




RECOMMENDED SPACING:

- ERL0601 RUNNERS EVERY 0.3 m OR 1 ft
- ERL1701 SUSPENSION BRACKETS EVERY 1.5 m OR 5 ft
- ERL2501 LINE PICKUP EVERY 2 m OR 6.5 ft

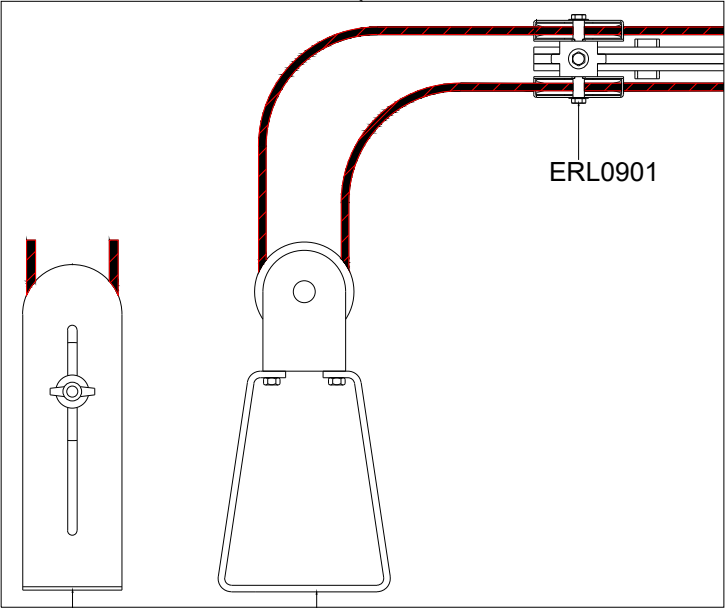


THIRD ANGLE PROJECTION

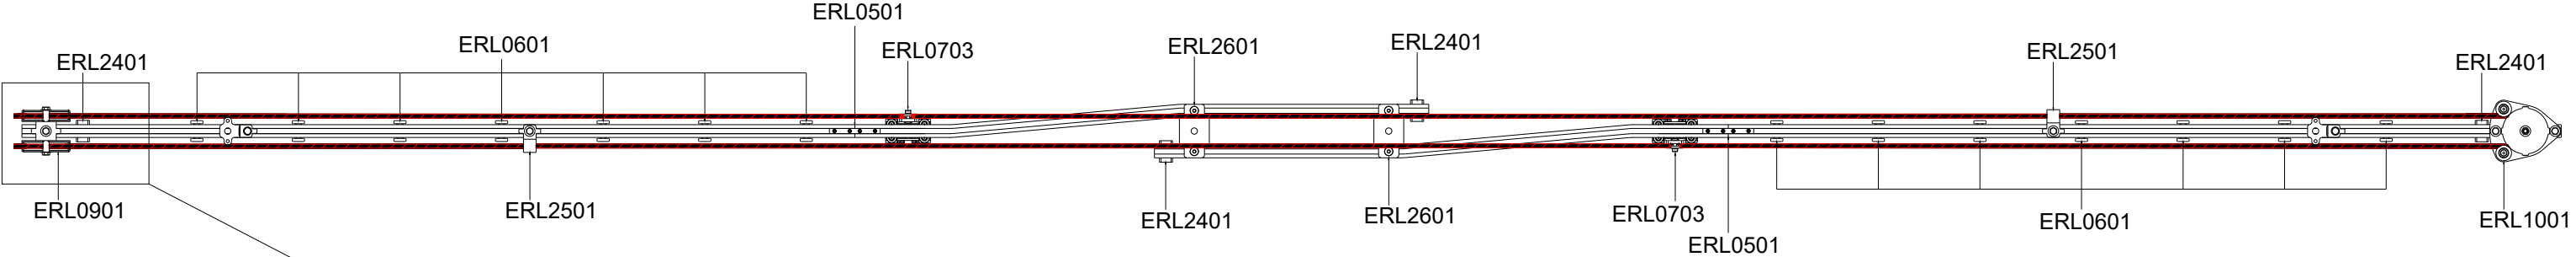


TRA1103

TRA1101


STRAIGHTCARRIER ROPE CLAMP METHOD



REAR ISO VIEW FOR
LEAD MASTER
RUNNER

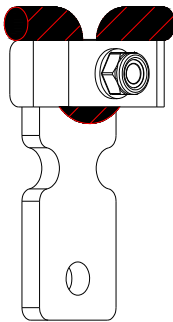


REAR ISO VIEW FOR
INTERMEDIARY
MASTER RUNNER




ERL0501




ERL0601




ERL0703



ERL0901



ERL1001




ERL1701



ERL2401



ERL2501



ERL2601



Triple E Ltd
13A AIRPORT IND. EST.
WIRELESS ROAD
BIGGIN HILL
KENT
TN16 3BW
TEL: +44 (0) 1959 570333
WWW.TRIPLEE.LTD

THE CONTENTS OF THIS DRAWING CONSTITUTES
DESIGN COPYRIGHT AND MAY NOT BE
REPRODUCED OR DISCLOSED TO A THIRD PARTY
WITHOUT PRIOR WRITTEN PERMISSION FROM
TRIPLE E LTD

ALL DIMENSIONS IN MILLIMETERS (mm)
UNLESS STATED OTHERWISE
GENERAL TOLERANCES TO FOLLOW ± 0.2

TITLE

STRAIGHT OFFSET OVERLAP
VIEWED FROM ABOVE

DRAWING No.

ERL-CD1

REV

2

SPECIAL INSTRUCTIONS

OTHER TYPES OF SUSPENSION CAN BE USED
IN CONJUNCTION WITH THE ERL1701
SUSPENSION BRACKET.

DRAWN BY:

DS

APPROVED BY:

LE

SCALE:

NTS

DATE:

12/01/2026

DATE:

12/01/2026

SHEET SIZE:

A3