



RECOMMENDED SPACING:


- ERL0601 RUNNERS EVERY 0.3 m OR 1 ft
- ERL1701 SUSPENSION BRACKETS EVERY 1.5 m OR 5 ft
- ERL2501 LINE PICKUP EVERY 2 m OR 6.5 ft




THIRD ANGLE PROJECTION

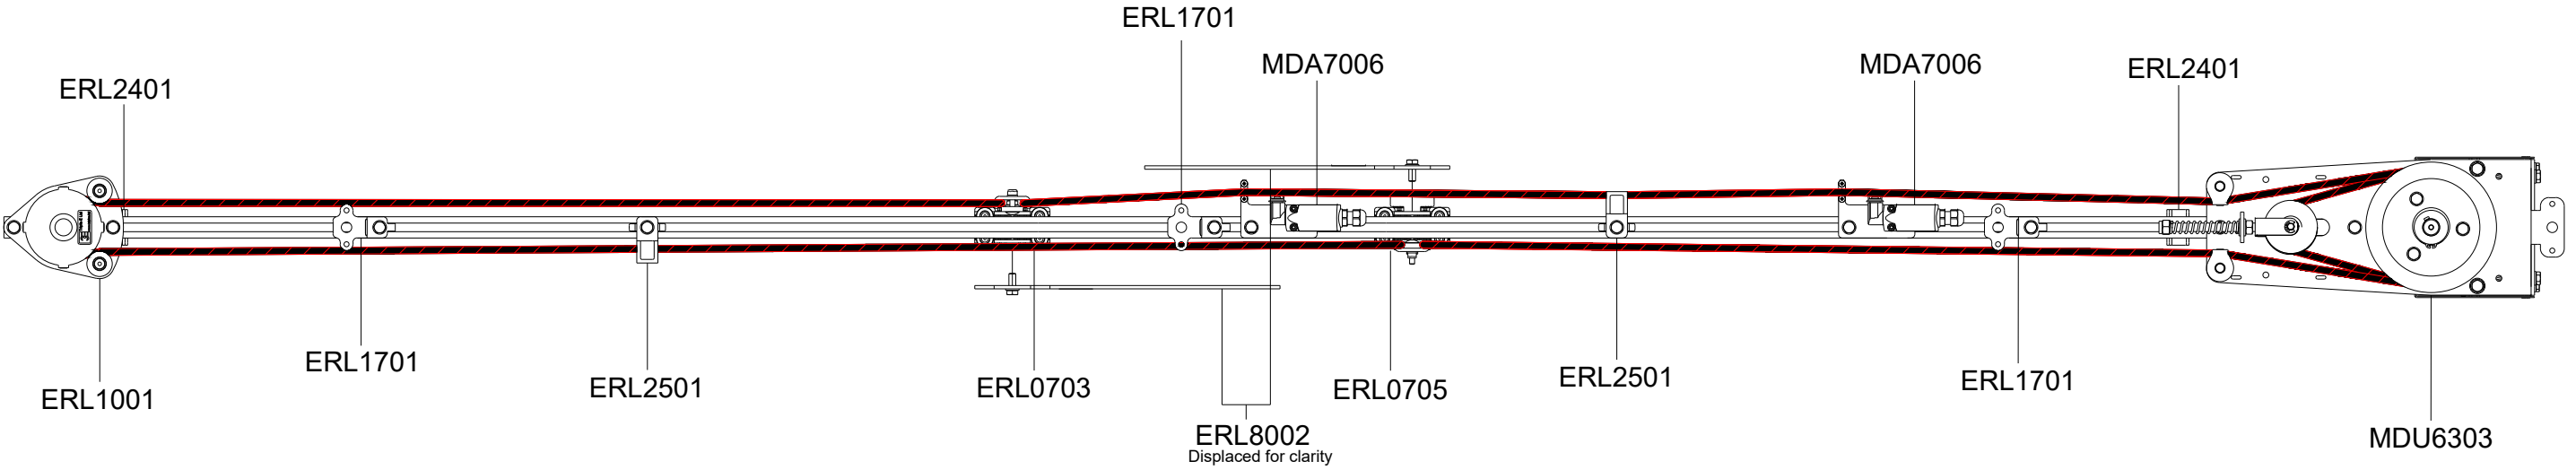

STRAIGHTCARRIER ROPE CLAMP METHOD




REAR ISO VIEW FOR
LEAD MASTER
RUNNER

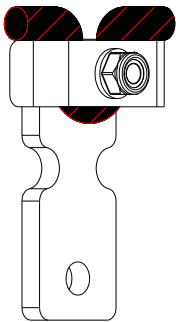


REAR ISO VIEW FOR
INTERMEDIARY
MASTER RUNNER




ERL0601




ERL0703




ERL0705




ERL8002



MDU6303



MDA7006




ERL1001



ERL2401



ERL2501



ERL1701



Triple E Ltd
13A AIRPORT IND. EST.
WIRELESS ROAD
BIGGIN HILL
KENT
TN16 3BW
TEL: +44 (0) 1959 570333
WWW.TRIPLEE.LTD

THE CONTENTS OF THIS DRAWING CONSTITUTES
DESIGN COPYRIGHT AND MAY NOT BE
REPRODUCED OR DISCLOSED TO A THIRD PARTY
WITHOUT PRIOR WRITTEN PERMISSION FROM
TRIPLE E LTD

ALL DIMENSIONS IN MILLIMETERS (mm)
UNLESS STATED OTHERWISE
GENERAL TOLERANCES TO FOLLOW ± 0.2

TITLE

STRAIGHT BI-PART MOTORISED
WITH OVERLAP ARMS
VIEWED FROM ABOVE

DRAWING No.

ERL-CD3-M

REV

1

SPECIAL INSTRUCTIONS

ERL0601 RUNNERS NOT SHOWN

OTHER TYPES OF SUSPENSION CAN BE USED
IN CONJUNCTION WITH THE ERL1701
SUSPENSION BRACKET.

DRAWN BY:

DS

DATE:

20/08/2026

APPROVED BY:

LE

DATE:

20/08/2026

SCALE:

NTS

SHEET SIZE:

A3