



RECOMMENDED SPACING:


- ERL0601 RUNNERS EVERY 0.3 m OR 1 ft
- ERL1701 SUSPENSION BRACKETS EVERY 1.5 m OR 5 ft
- ERL2501 LINE PICKUP EVERY 2 m OR 6.5 ft




THIRD ANGLE PROJECTION

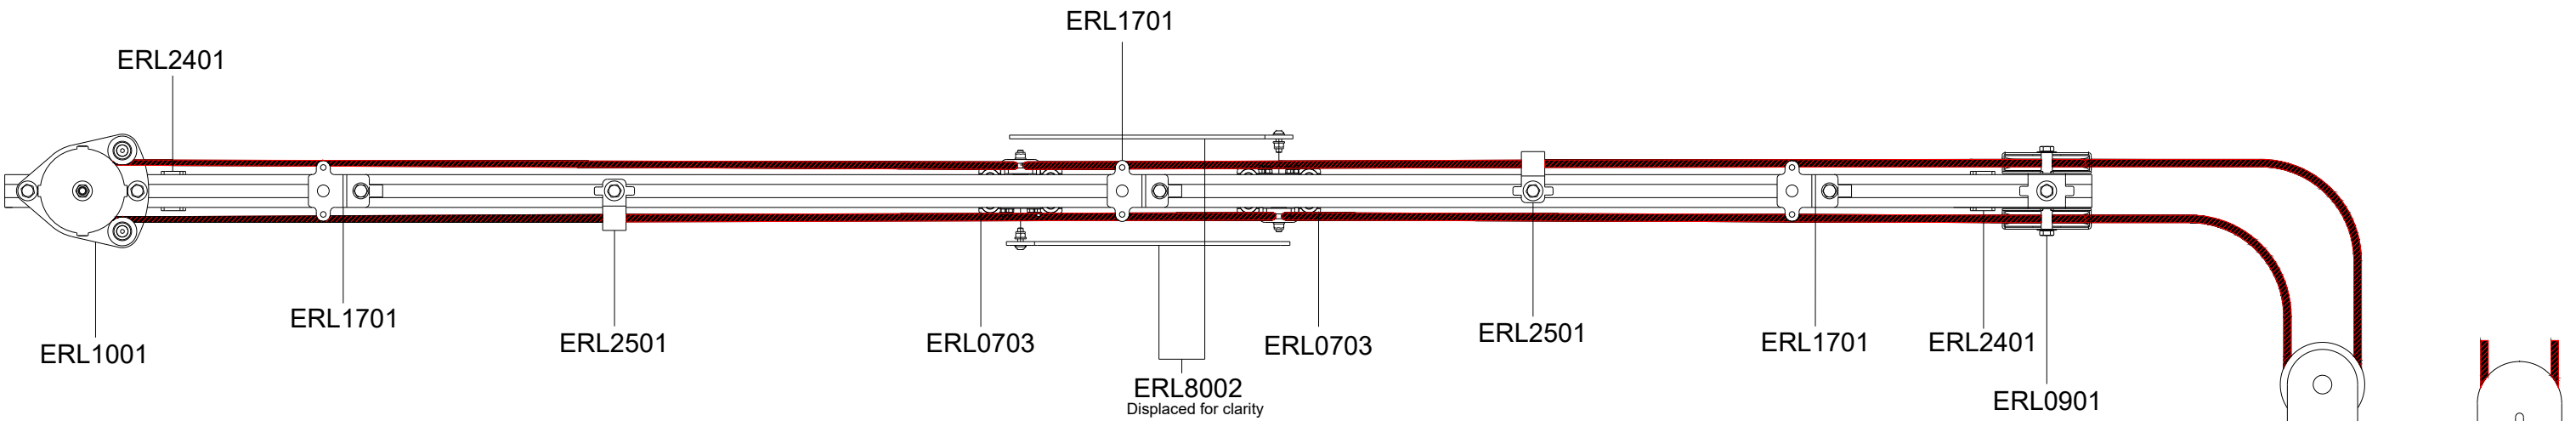


STRAIGHTCARRIER ROPE CLAMP METHOD




REAR ISO VIEW FOR
LEAD MASTER
RUNNER




REAR ISO VIEW FOR
INTERMEDIARY
MASTER RUNNER




ERL0703

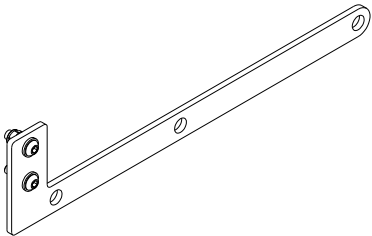

ERL8002




ERL0901



ERL1001



ERL1701



ERL2401



Triple E Ltd
13A AIRPORT IND. EST.
WIRELESS ROAD
BIGGIN HILL
KENT
TN16 3BW
TEL: +44 (0) 1959 570333
WWW.TRIPLEE.LTD

THE CONTENTS OF THIS DRAWING CONSTITUTES
DESIGN COPYRIGHT AND MAY NOT BE
REPRODUCED OR DISCLOSED TO A THIRD PARTY
WITHOUT PRIOR WRITTEN PERMISSION FROM
TRIPLE E LTD

ALL DIMENSIONS IN MILLIMETERS (mm)
UNLESS STATED OTHERWISE
GENERAL TOLERANCES TO FOLLOW ± 0.2

TITLE
**STRAIGHT BI-PART WITH OVERLAP ARMS
VIEWED FROM ABOVE**

DRAWING No.
ERL-CD3

REV
2

SPECIAL INSTRUCTIONS
ERL0601 RUNNERS NOT SHOWN.

OTHER TYPES OF SUSPENSION CAN BE USED
IN CONJUNCTION WITH THE ERL1701
SUSPENSION BRACKET.

DRAWN BY: DS	DATE: 18/02/2026
APPROVED BY: LE	DATE: 18/02/2026
SCALE: NTS	SHEET SIZE: A3