



RECOMMENDED SPACING:


- ERL0601 RUNNERS EVERY 0.3 m OR 1 ft
- ERL1702 SUSPENSION BRACKETS EVERY 1.5 m OR 5 ft
- ERL1902 CORD GUIDE EVERY 2 m OR 6.5 ft ON STRAIGHT TRACK. EVERY 0.5 m OR 1.6 ft ON CURVED TRACK.




THIRD ANGLE PROJECTION

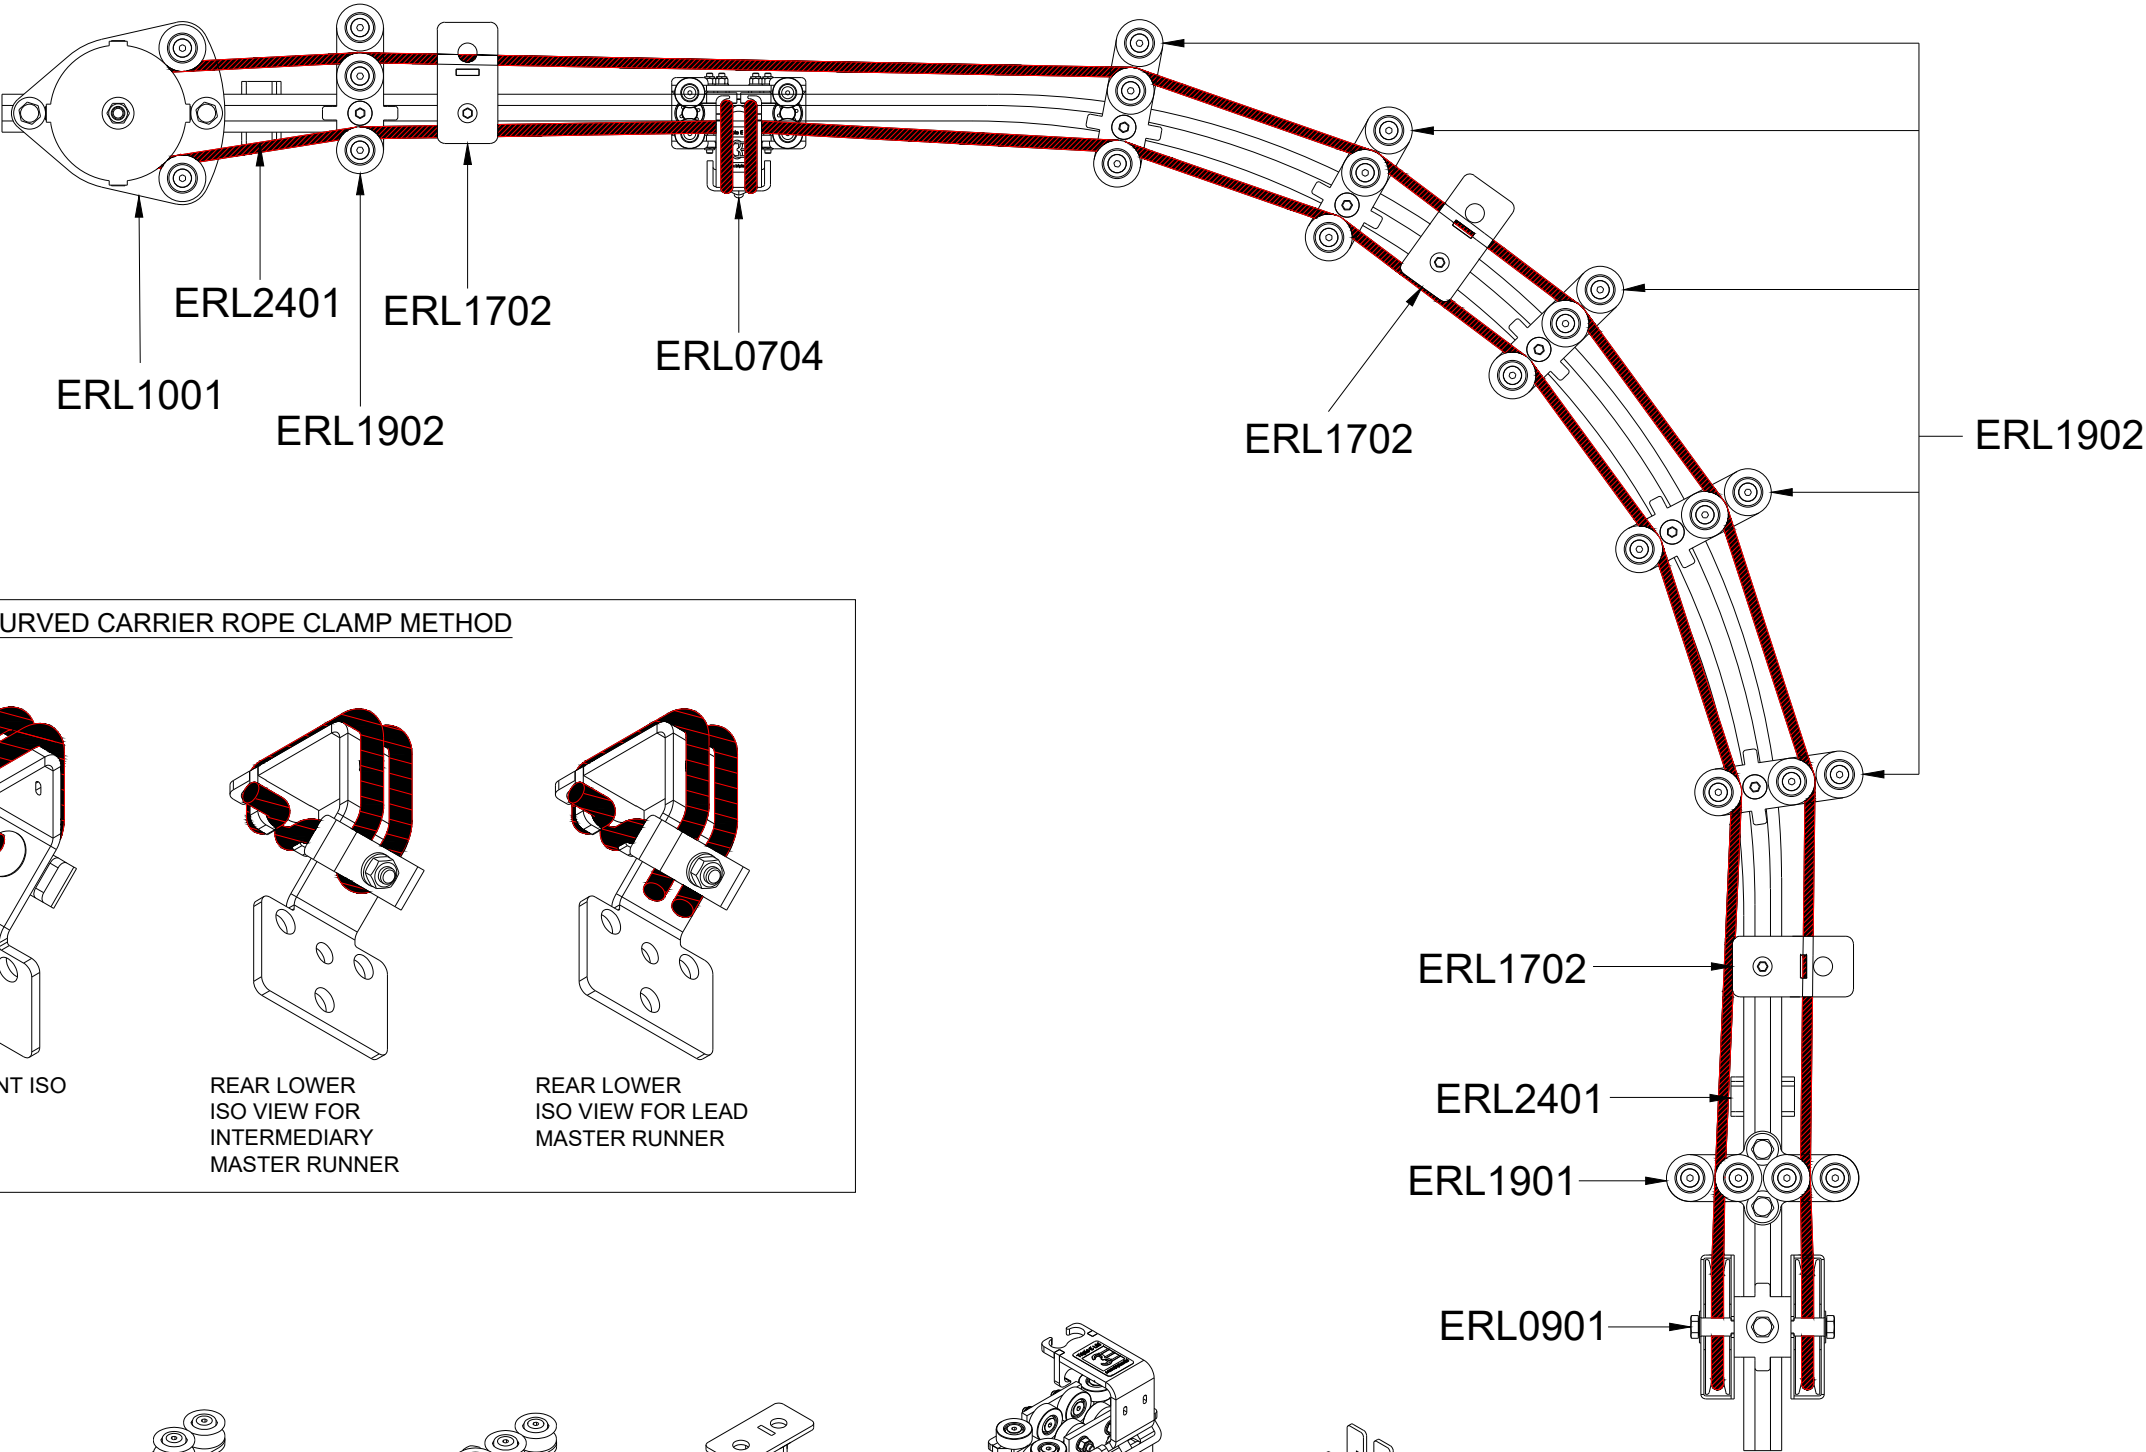


CURVED CARRIER ROPE CLAMP METHOD

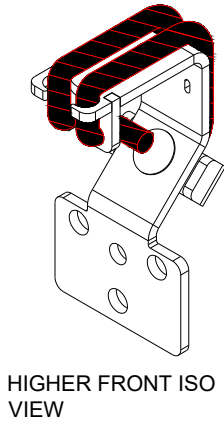


HIGHER FRONT ISO VIEW

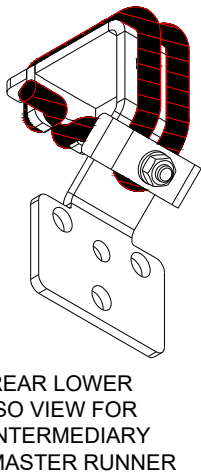


REAR LOWER ISO VIEW FOR INTERMEDIARY MASTER RUNNER

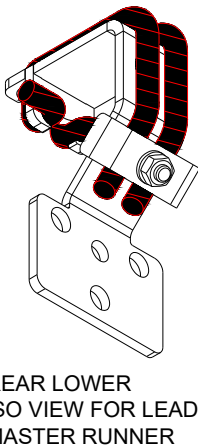


REAR LOWER ISO VIEW FOR LEAD MASTER RUNNER




ERL0901




ERL1001




ERL1902



ERL1901



ERL1702



ERL0704



ERL2401



Triple E Ltd
13A AIRPORT IND. EST.
WIRELESS ROAD
BIGGIN HILL
KENT
TN16 3BW
TEL: +44 (0) 1959 570333
WWW.TRIPLEE.LTD

THE CONTENTS OF THIS DRAWING CONSTITUTES DESIGN COPYRIGHT AND MAY NOT BE REPRODUCED OR DISCLOSED TO A THIRD PARTY WITHOUT PRIOR WRITTEN PERMISSION FROM TRIPLE E LTD

ALL DIMENSIONS IN MILLIMETERS (mm)
UNLESS STATED OTHERWISE
GENERAL TOLERANCES TO FOLLOW ± 0.2

TITLE

L-SHAPE WIPE

DRAWING No.

ERL-CD4

REV

2

SPECIAL INSTRUCTIONS

ERL0601 RUNNERS NOT SHOWN. TRA1101 TRA1103 FLOOR PULLEYS NOT SHOWN BUT ARE REQUIRED.

OTHER TYPES OF SUSPENSION CAN BE USED IN CONJUNCTION WITH THE ERL1702 SUSPENSION BRACKET.

DRAWN BY:

DS

APPROVED BY:

LE

SCALE:

NTS

DATE:

18/02/2026

DATE:

18/02/2026

SHEET SIZE:

A3