



RECOMMENDED SPACING:

- ERL0601 RUNNERS EVERY 0.3 m OR 1 ft
- ERL1702 SUSPENSION BRACKETS EVERY 1.5 m OR 5 ft
- ERL1902 CORD GUIDE EVERY 2 m OR 6.5 ft ON STRAIGHT TRACK. EVERY 0.5 m OR 1.6 ft ON CURVED TRACK.



THIRD ANGLE PROJECTION

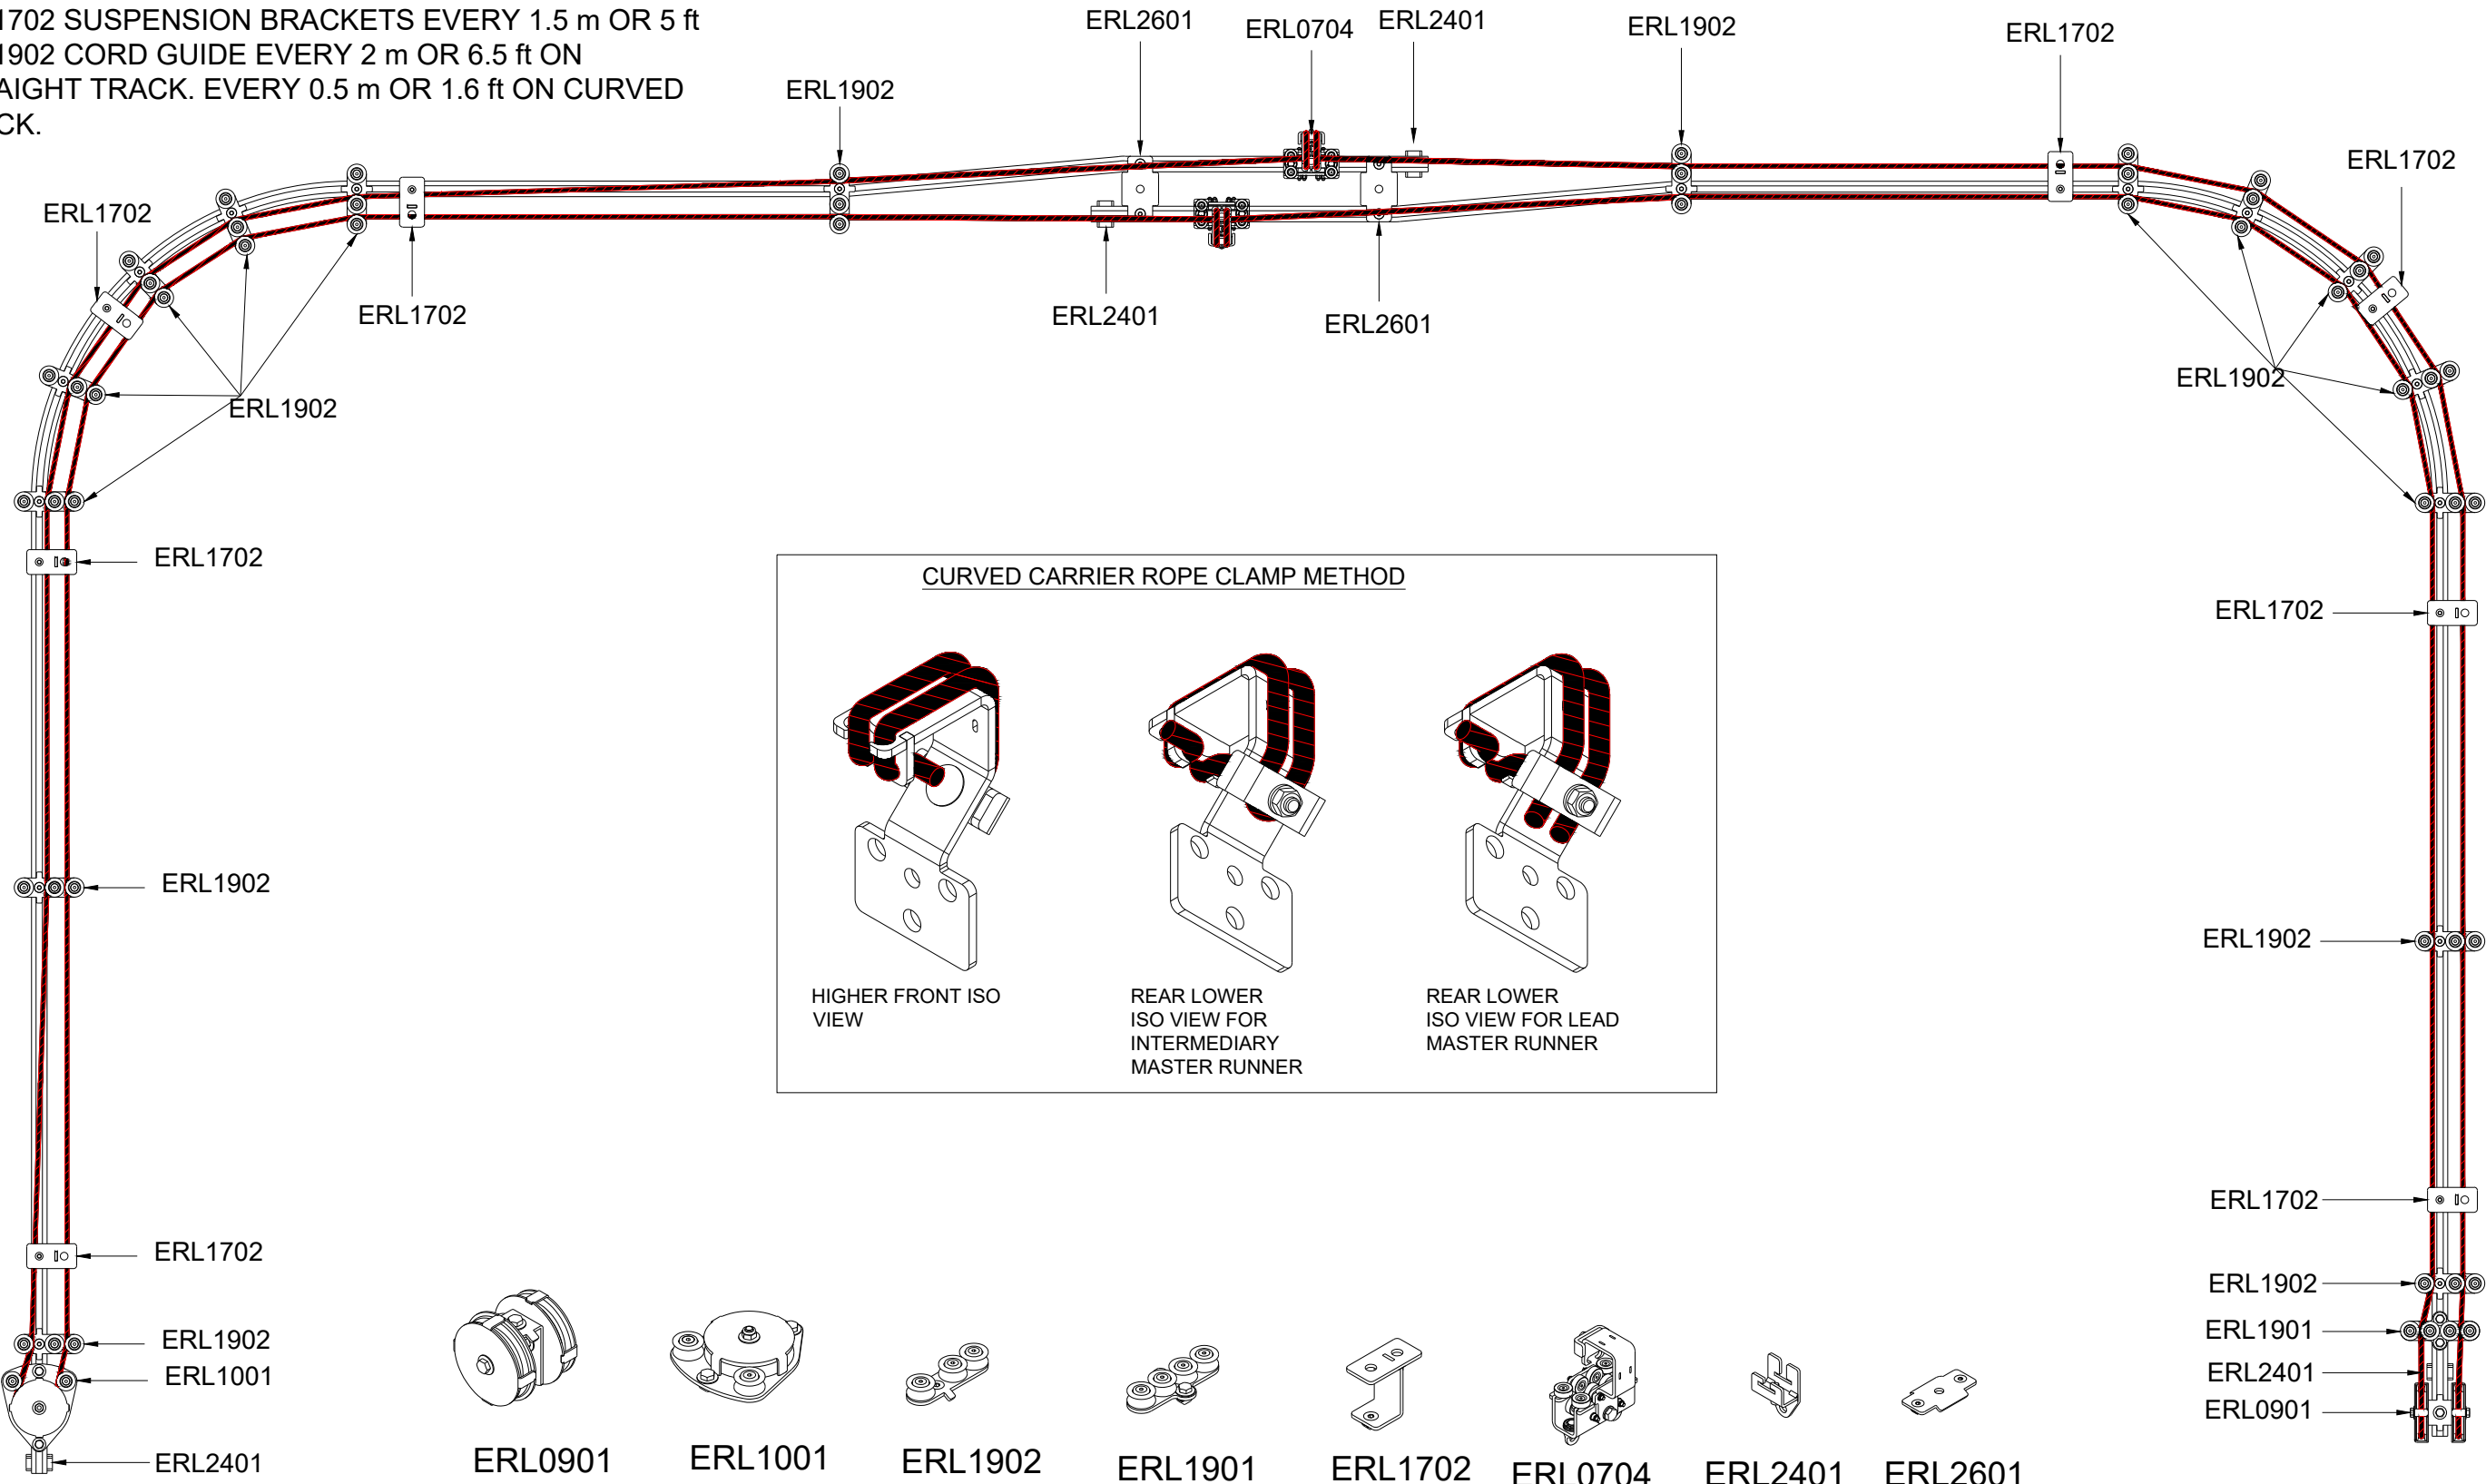

Triple E Ltd
13A AIRPORT IND. EST.
WIRELESS ROAD
BIGGIN HILL
KENT
TN16 3BW
TEL: +44 (0) 1959 570333
WWW.TRIPLEE.LTD

THE CONTENTS OF THIS DRAWING CONSTITUTES
DESIGN COPYRIGHT AND MAY NOT BE
REPRODUCED OR DISCLOSED TO A THIRD PARTY
WITHOUT PRIOR WRITTEN PERMISSION FROM
TRIPLE E LTD

ALL DIMENSIONS IN MILLIMETERS (mm)
UNLESS STATED OTHERWISE
GENERAL TOLERANCES TO FOLLOW ± 0.2

TITLE
**U-SHAPE OFFSET OVERLAPPING TRACKS
VIEWED FROM ABOVE**

DRAWING No.
ERL-CD5

REV
2

SPECIAL INSTRUCTIONS
ERL0601 RUNNERS NOT SHOWN. TRA1101 OR
TRA1103 NOT SHOWN BUT ARE REQUIRED.

OTHER TYPES OF SUSPENSION CAN BE USED
IN CONJUNCTION WITH THE ERL1702
SUSPENSION BRACKET.

DRAWN BY: DS	DATE: 18/02/2026
APPROVED BY: LE	DATE: 18/02/2026
SCALE: NTS	SHEET SIZE: A3