



RECOMMENDED SPACING:

- ERL0601 RUNNERS EVERY 0.3 m OR 1 ft
- ERL1702 SUSPENSION BRACKETS EVERY 1.5 m OR 5 ft
- ERL1902 CORD GUIDE EVERY 2 m OR 6.5 ft ON STRAIGHT TRACK. EVERY 0.5 m OR 1.6 ft ON CURVED TRACK.



THIRD ANGLE PROJECTION

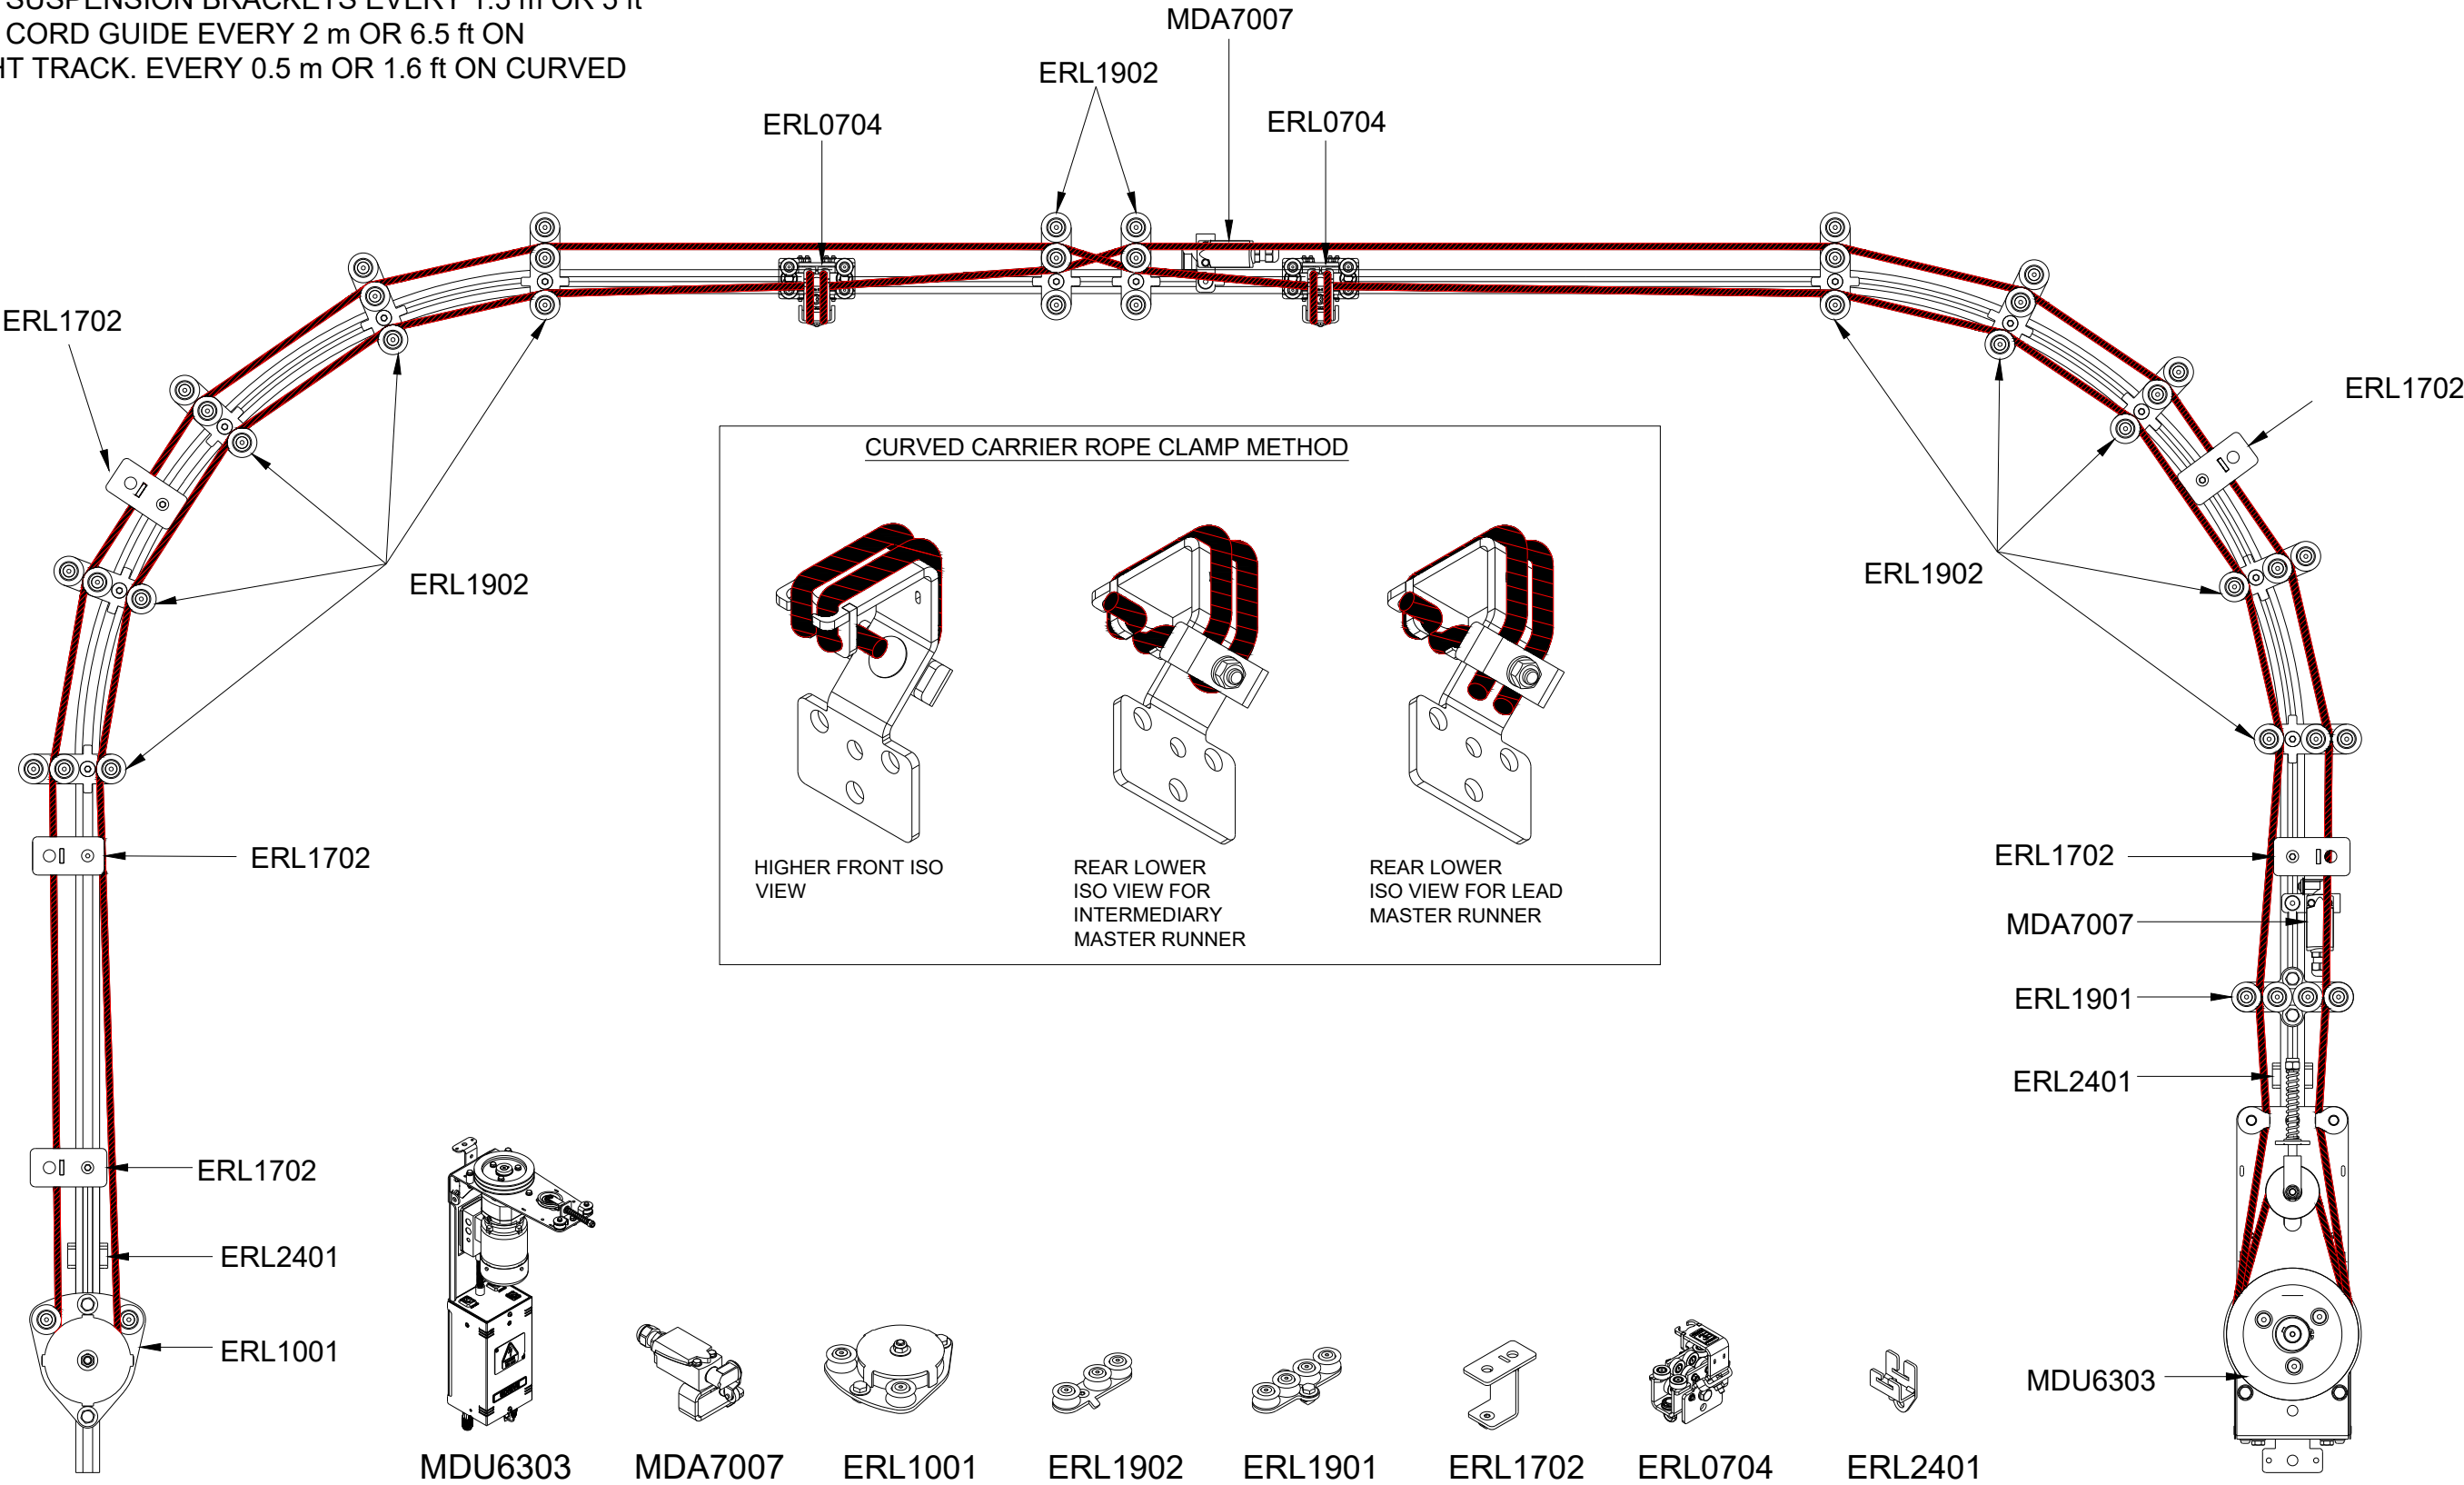

**Triple E Ltd**  
13A AIRPORT IND. EST.  
WIRELESS ROAD  
BIGGIN HILL  
KENT  
TN16 3BW  
TEL: +44 (0) 1959 570333  
WWW.TRIPLEE.LTD

THE CONTENTS OF THIS DRAWING CONSTITUTES  
DESIGN COPYRIGHT AND MAY NOT BE  
REPRODUCED OR DISCLOSED TO A THIRD PARTY  
WITHOUT PRIOR WRITTEN PERMISSION FROM  
TRIPLE E LTD

ALL DIMENSIONS IN MILLIMETERS (mm)  
UNLESS STATED OTHERWISE  
GENERAL TOLERANCES TO FOLLOW  $\pm 0.2$

TITLE  
**U-SHAPE CENTRE CROSSOVER  
VIEWED FROM ABOVE**

DRAWING No.  
**ERL-CD6**

REV  
**2**

SPECIAL INSTRUCTIONS  
ERL0601 RUNNERS NOT SHOWN.

OTHER TYPES OF SUSPENSION CAN BE USED  
IN CONJUNCTION WITH THE ERL1702  
SUSPENSION BRACKET.

|                           |                            |
|---------------------------|----------------------------|
| DRAWN BY:<br><b>DS</b>    | DATE:<br><b>20/08/2026</b> |
| APPROVED BY:<br><b>LE</b> | DATE:<br><b>20/08/2026</b> |
| SCALE:<br><b>NTS</b>      | SHEET SIZE:<br><b>A3</b>   |