



RECOMMENDED SPACING:

- ERL0601 RUNNERS EVERY 0.3 m OR 1 ft
- ERL1702 SUSPENSION BRACKETS EVERY 1.5 m OR 5 ft
- ERL1902 CORD GUIDE EVERY 2 m OR 6.5 ft ON STRAIGHT TRACK. EVERY 0.5 m OR 1.6 ft ON CURVED TRACK.



THIRD ANGLE PROJECTION

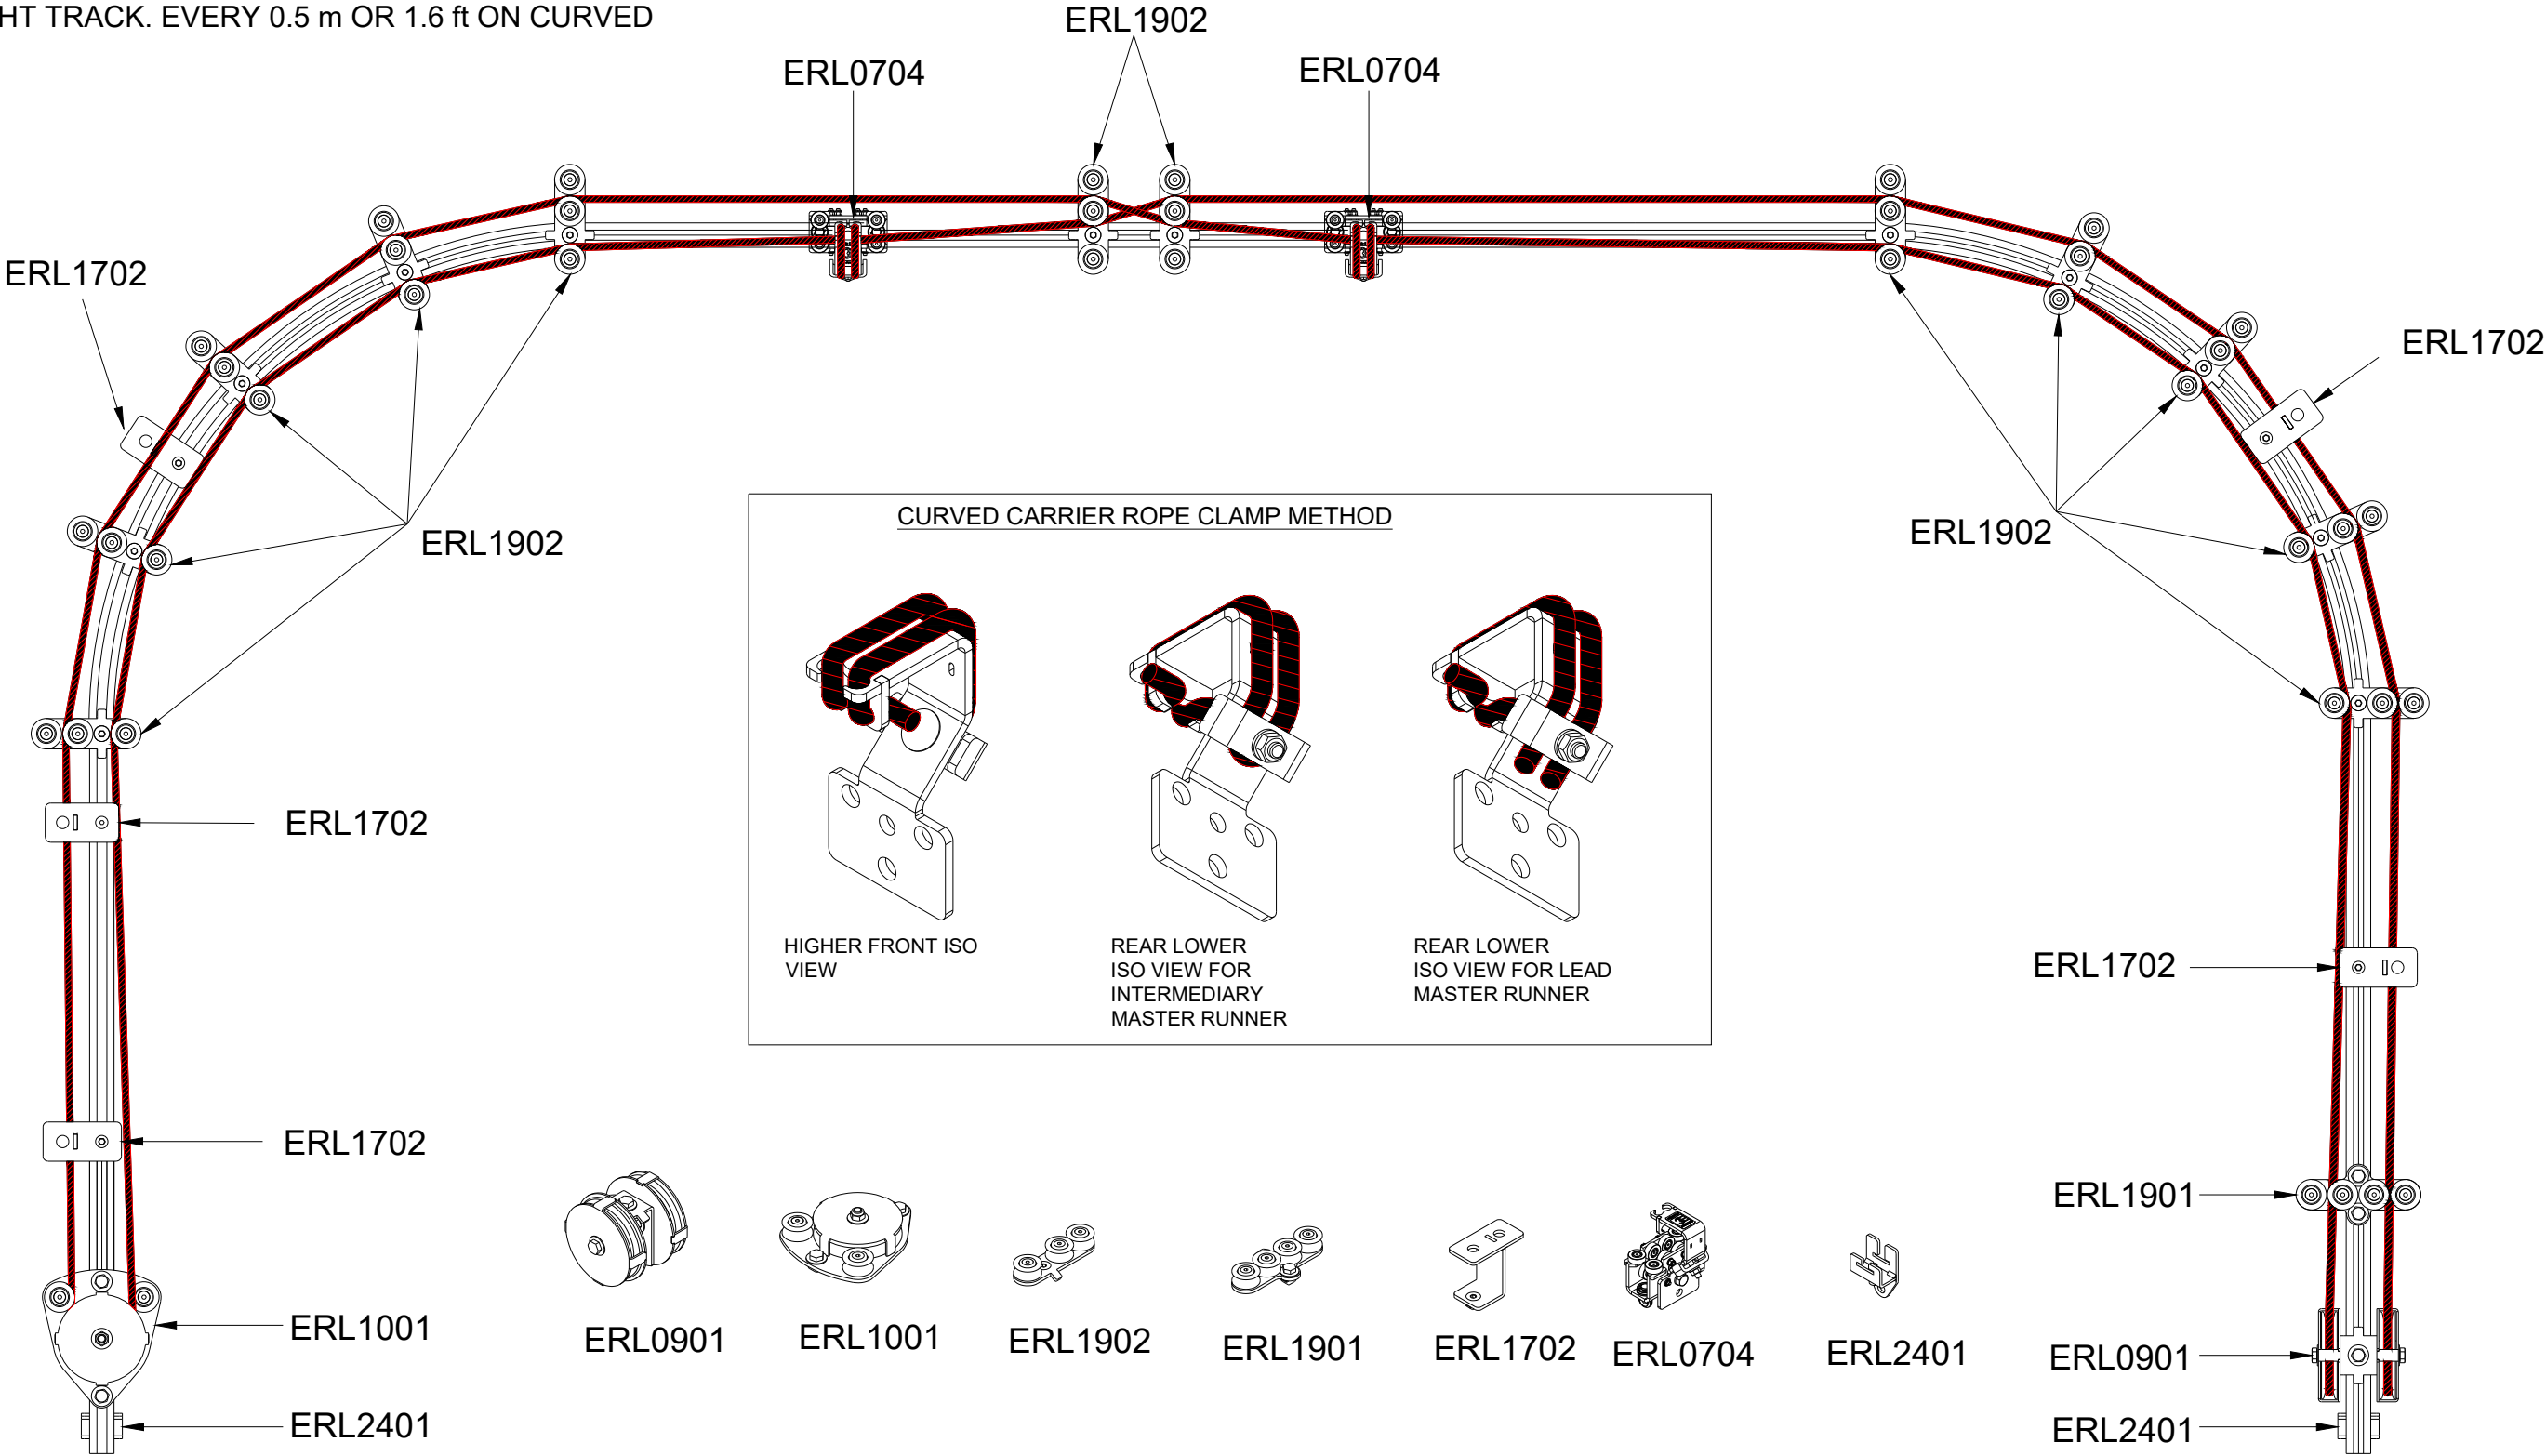

Triple E Ltd
13A AIRPORT IND. EST.
WIRELESS ROAD
BIGGIN HILL
KENT
TN16 3BW
TEL: +44 (0) 1959 570333
WWW.TRIPLEE.LTD

THE CONTENTS OF THIS DRAWING CONSTITUTES
DESIGN COPYRIGHT AND MAY NOT BE
REPRODUCED OR DISCLOSED TO A THIRD PARTY
WITHOUT PRIOR WRITTEN PERMISSION FROM
TRIPLE E LTD

ALL DIMENSIONS IN MILLIMETERS (mm)
UNLESS STATED OTHERWISE
GENERAL TOLERANCES TO FOLLOW ± 0.2

TITLE

U-SHAPE CENTRE CROSSOVER
VIEWED FROM ABOVE

DRAWING No.

ERL-CD6

REV

2

SPECIAL INSTRUCTIONS

ERL0601 RUNNERS NOT SHOWN. TRA1101 OR
TRA1103 NOT SHOWN BUT ARE REQUIRED.

OTHER TYPES OF SUSPENSION CAN BE USED
IN CONJUNCTION WITH THE ERL1702
SUSPENSION BRACKET.

DRAWN BY:

DS

APPROVED BY:

LE

SCALE:

NTS

DATE:

18/02/2026

DATE:

18/02/2026

SHEET SIZE:

A3