




RECOMMENDED SPACING:

- TRA0601 / TRA0603 RUNNERS EVERY 0.3 m OR 1 ft
- TRA2501 LINE PICKUP EVERY 2 m OR 6.5 ft
- SUSPENSION EVERY 1.5 m OR 5 ft

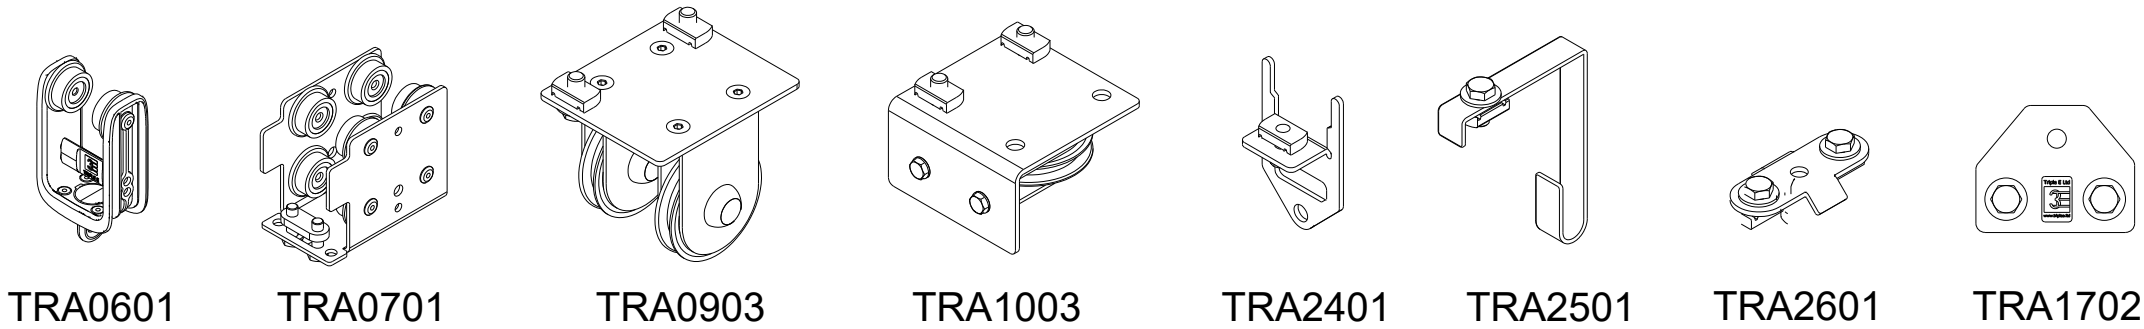

THIRD ANGLE PROJECTION

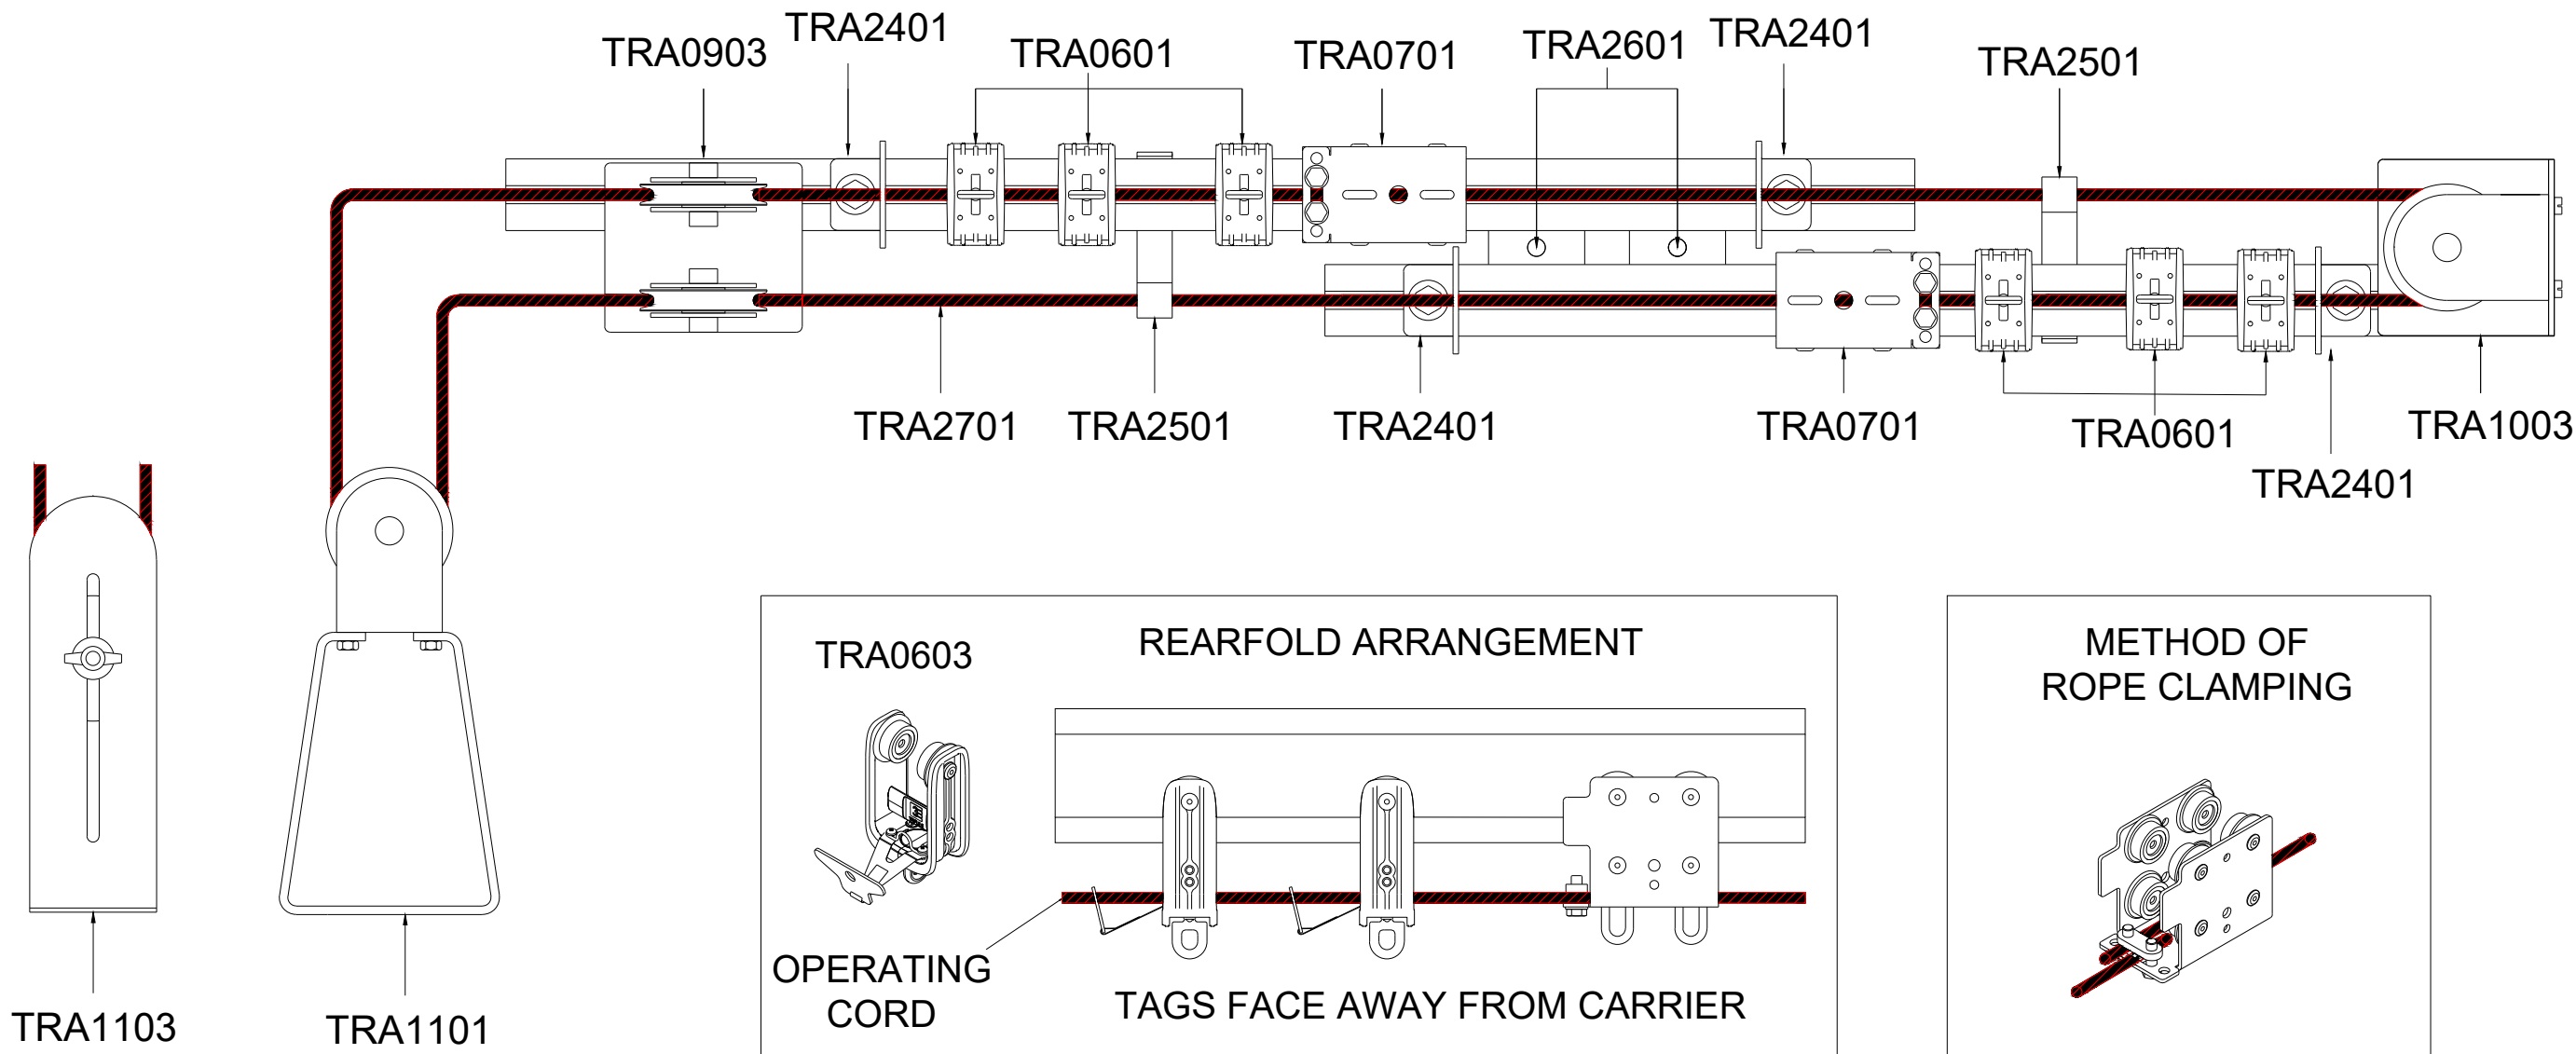

Triple E Ltd
13A AIRPORT IND. EST.
WIRELESS ROAD
BIGGIN HILL
KENT
TN16 3BW
TEL: +44 (0) 1959 570333
WWW.TRIPLEE.LTD

THE CONTENTS OF THIS DRAWING CONSTITUTES
DESIGN COPYRIGHT AND MAY NOT BE
REPRODUCED OR DISCLOSED TO A THIRD PARTY
WITHOUT PRIOR WRITTEN PERMISSION FROM
TRIPLE E LTD

ALL DIMENSIONS IN MILLIMETERS (mm)
UNLESS STATED OTHERWISE
GENERAL TOLERANCES TO FOLLOW ± 0.2

TITLE
**STRAIGHT OFFSET CENTRE OVERLAP
VIEWED FROM UNDERSIDE**

DRAWING No.
UBM-CD1

REV
2

SPECIAL INSTRUCTIONS
TRA1702 SUSPENSION PLATE NOT SHOWN ON
DRAWING BUT IS REQUIRED.

OTHER TYPES OF SUSPENSION CAN BE USED IN
CONJUNCTION WITH TRA1702 SUSPENSION
BRACKET.

DRAWN BY: DS	DATE: 12/01/2026
APPROVED BY: LE	DATE: 14/01/2026
SCALE: NTS	SHEET SIZE: A3