



RECOMMENDED SPACING:


- TRA0602 RUNNERS EVERY 0.3 m OR 1 ft.
- TRA1901 CORD GUIDES EVERY 2 m OR 6.5 ft ON STRAIGHT TRACK. EVERY 0.5 m OR 1.6 ft ON CURVED TRACK.
- TRA1703 SUSPENSION BRACKETS EVERY 1.5 m OR 5 ft.



THIRD ANGLE PROJECTION

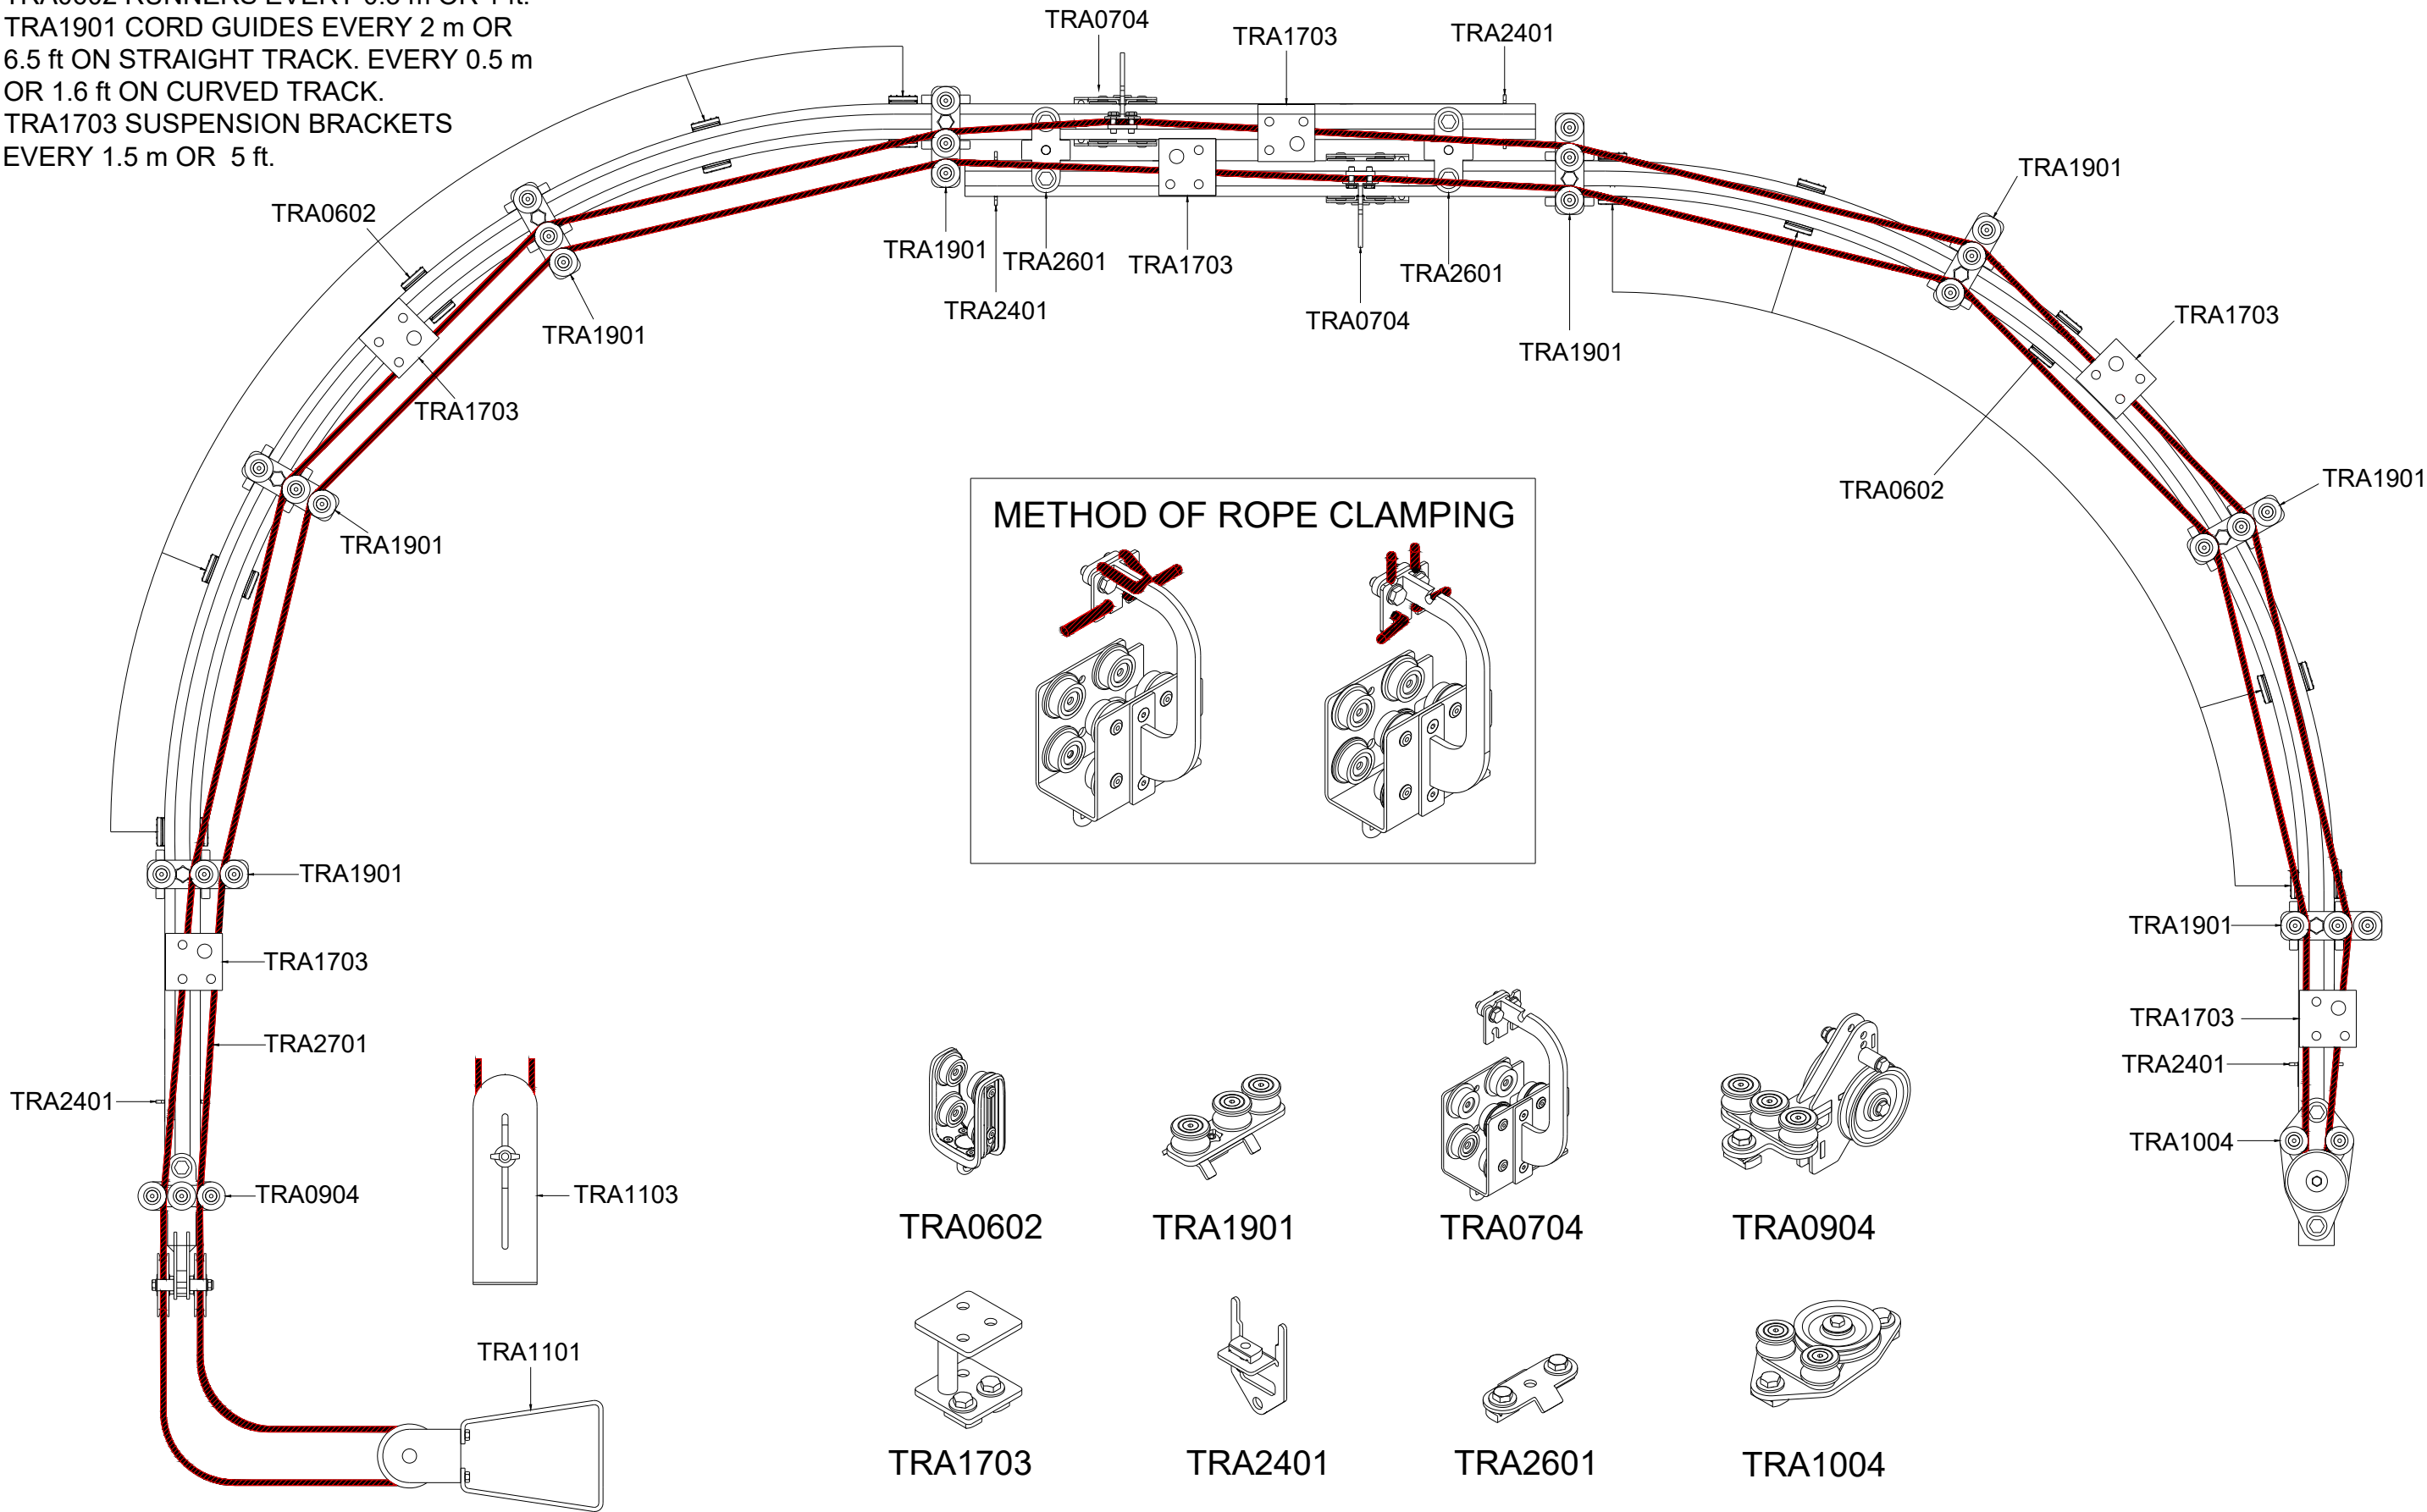

METHOD OF ROPE CLAMPING

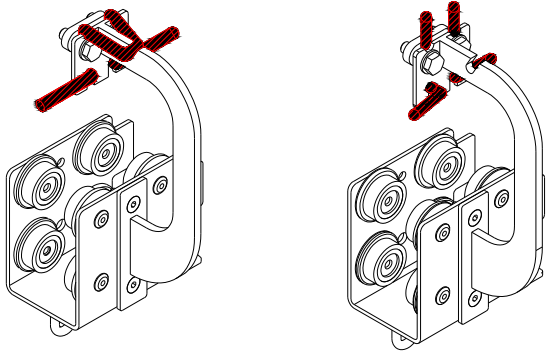

TRA0602

TRA1901

TRA0704

TRA0904

TRA1703

TRA2401

TRA2601

TRA1004



Triple E Ltd
13A AIRPORT IND. EST.
WIRELESS ROAD
BIGGIN HILL
KENT
TN16 3BW
TEL: +44 (0) 1959 570333
WWW.TRIPLEE.LTD

THE CONTENTS OF THIS DRAWING CONSTITUTES
DESIGN COPYRIGHT AND MAY NOT BE
REPRODUCED OR DISCLOSED TO A THIRD PARTY
WITHOUT PRIOR WRITTEN PERMISSION FROM
TRIPLE E LTD

ALL DIMENSIONS IN MILLIMETERS (mm)
UNLESS STATED OTHERWISE
GENERAL TOLERANCES TO FOLLOW ± 0.2

TITLE

CURVED OFFSET OVERLAP
VIEWED FROM ABOVE

DRAWING No.

UBM-CD3

REV

2

SPECIAL INSTRUCTIONS

OTHER TYPES OF SUSPENSION CAN BE USED
IN CONJUNCTION WITH TRA1703 SUSPENSION
BRACKET.

DRAWN BY:

DS

DATE:

15/06/2026

APPROVED BY:

DATE:

SCALE:

NTS

SHEET SIZE:

A3