



RECOMMENDED SPACING:



- A MINIMUM OF 2 SCENERY CARRIERS PER SCENIC ITEM IS ADVISED.
- TRA1906 CORD GUIDES EVERY 2 m OR 6.5 ft.
- SUSPENSION EVERY 1.5 m OR 5 ft




THIRD ANGLE PROJECTION

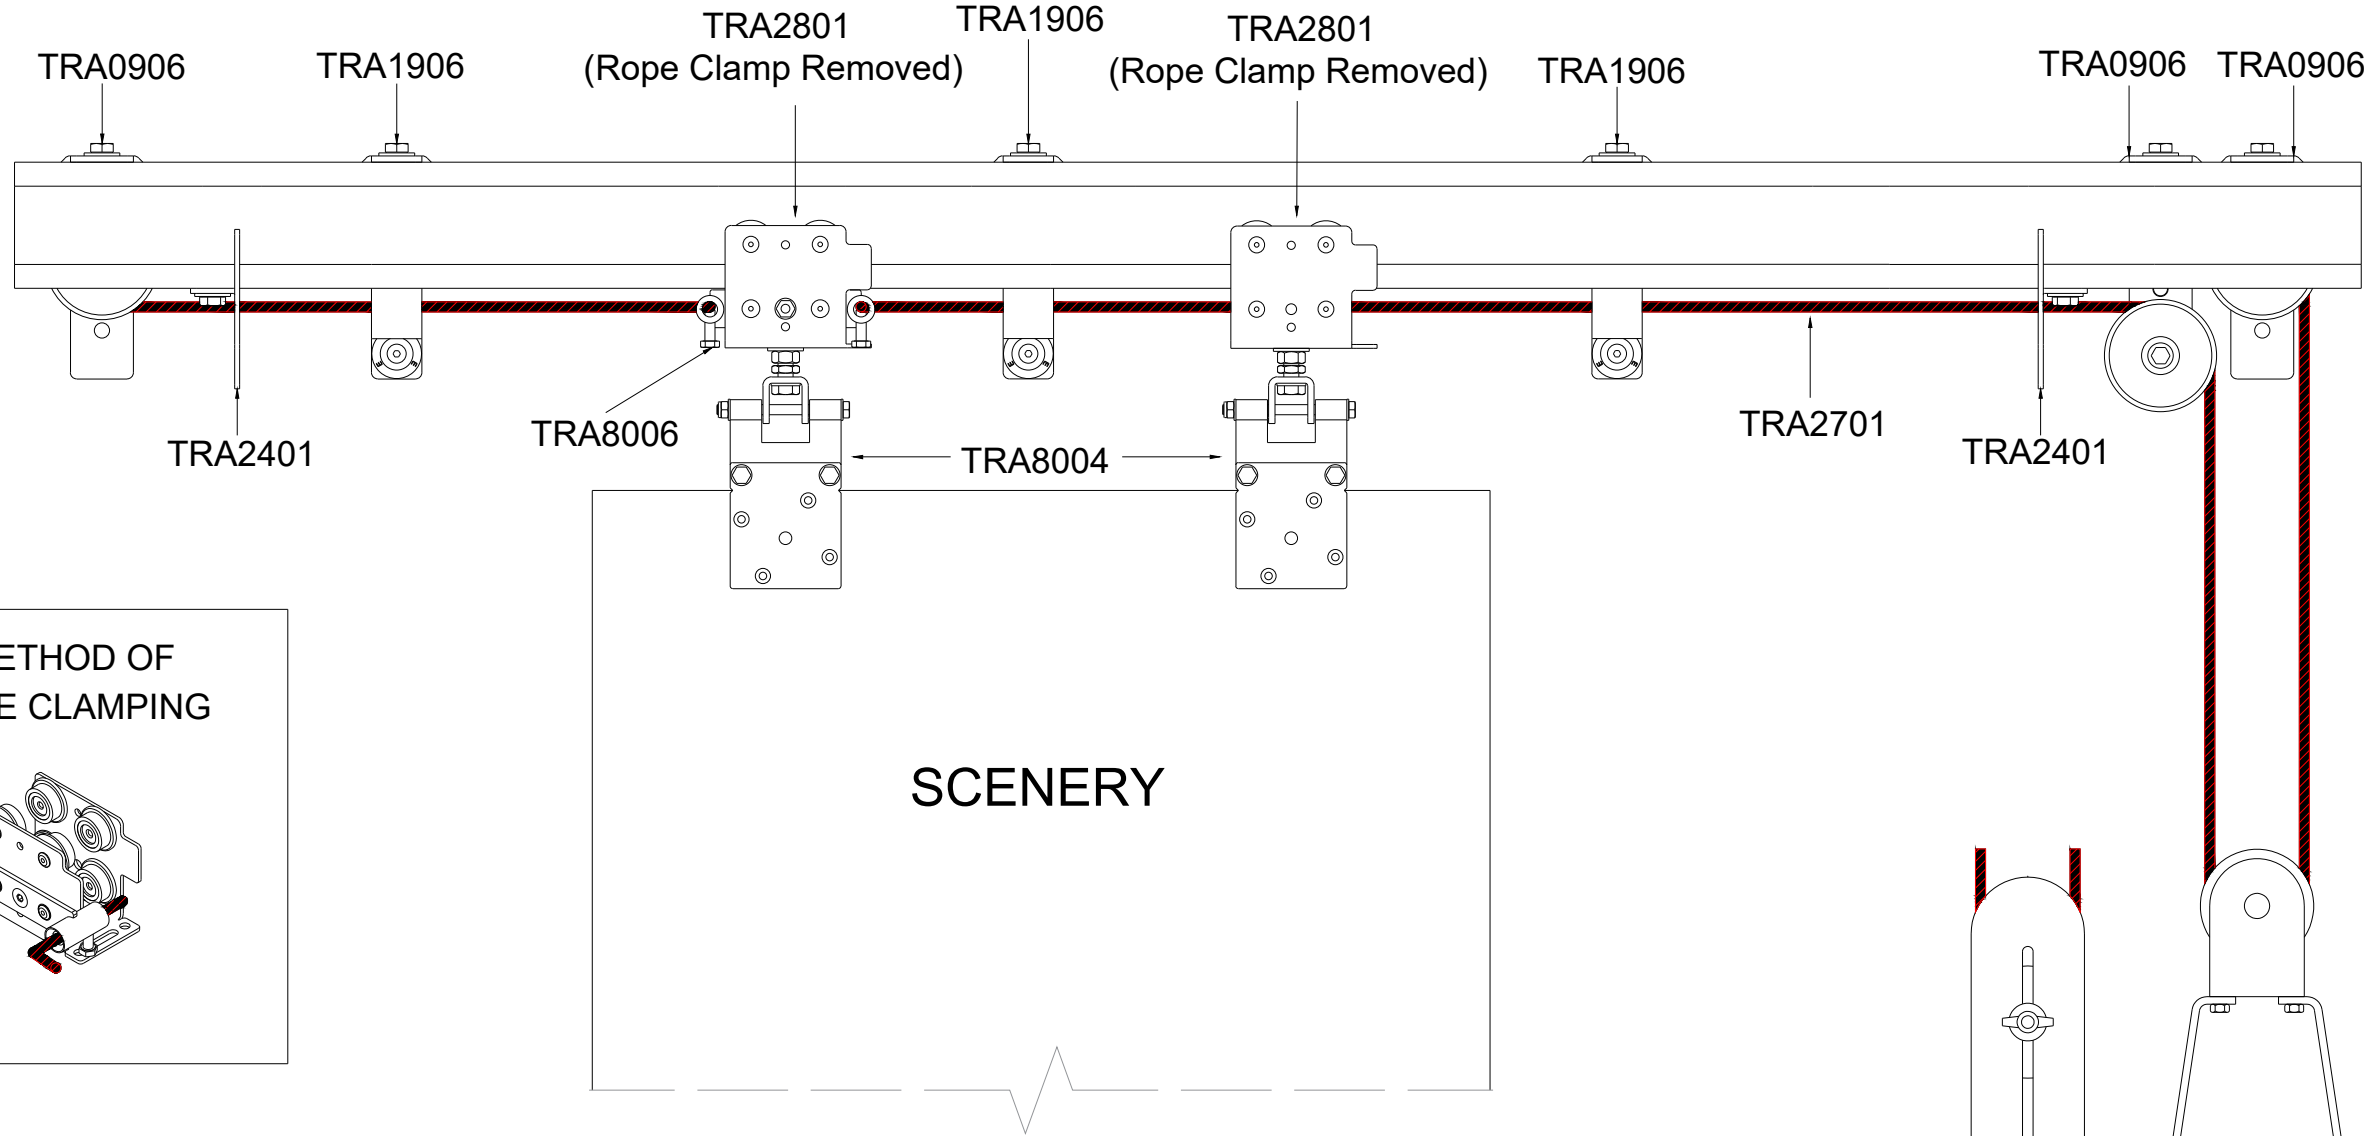


METHOD OF ROPE CLAMPING

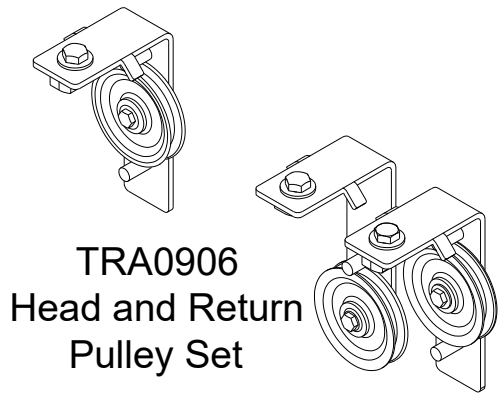


TRA0906
Head and Return
Pulley Set




TRA8004




TRA2801
(Rope Clamp Removed)




TRA1906




TRA8006



TRA2401

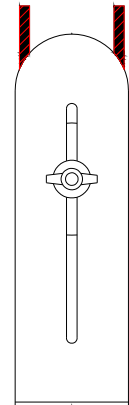

TRA1103

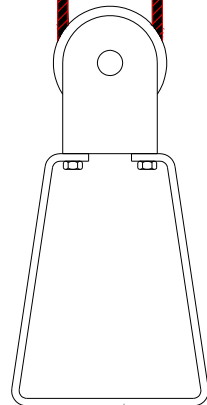

TRA1101



Triple E Ltd
13A AIRPORT IND. EST.
WIRELESS ROAD
BIGGIN HILL
KENT
TN16 3BW
TEL: +44 (0) 1959 570333
WWW.TRIPLEE.LTD

THE CONTENTS OF THIS DRAWING CONSTITUTES
DESIGN COPYRIGHT AND MAY NOT BE
REPRODUCED OR DISCLOSED TO A THIRD PARTY
WITHOUT PRIOR WRITTEN PERMISSION FROM
TRIPLE E LTD

ALL DIMENSIONS IN MILLIMETERS (mm)
UNLESS STATED OTHERWISE
GENERAL TOLERANCES TO FOLLOW ± 0.2

TITLE

SIDE CORD WIPE FOR SCENERY
VIEWED FROM SIDE

DRAWING No.

UBM-CD11

REV

2

SPECIAL INSTRUCTIONS

SUSPENSION METHOD NOT SHOWN.

HEAVY DUTY SCENERY CARRIERS ARE ALSO
AVAILABLE. HD END STOPS SHOULD BE USED
WITH THESE CARRIERS.

DRAWN BY:

DS

APPROVED BY:

SCALE:

NTS

DATE:

15/06/2026

DATE:

SHEET SIZE:

A3