



RECOMMENDED SPACING:



- A MINIMUM OF 2 SCENERY CARRIERS PER SCENIC ITEM IS ADVISED.
- TRA1906 CORD GUIDES EVERY 2 m OR 6.5 ft.
- SUSPENSION EVERY 1.5 m OR 5 ft.



THIRD ANGLE PROJECTION

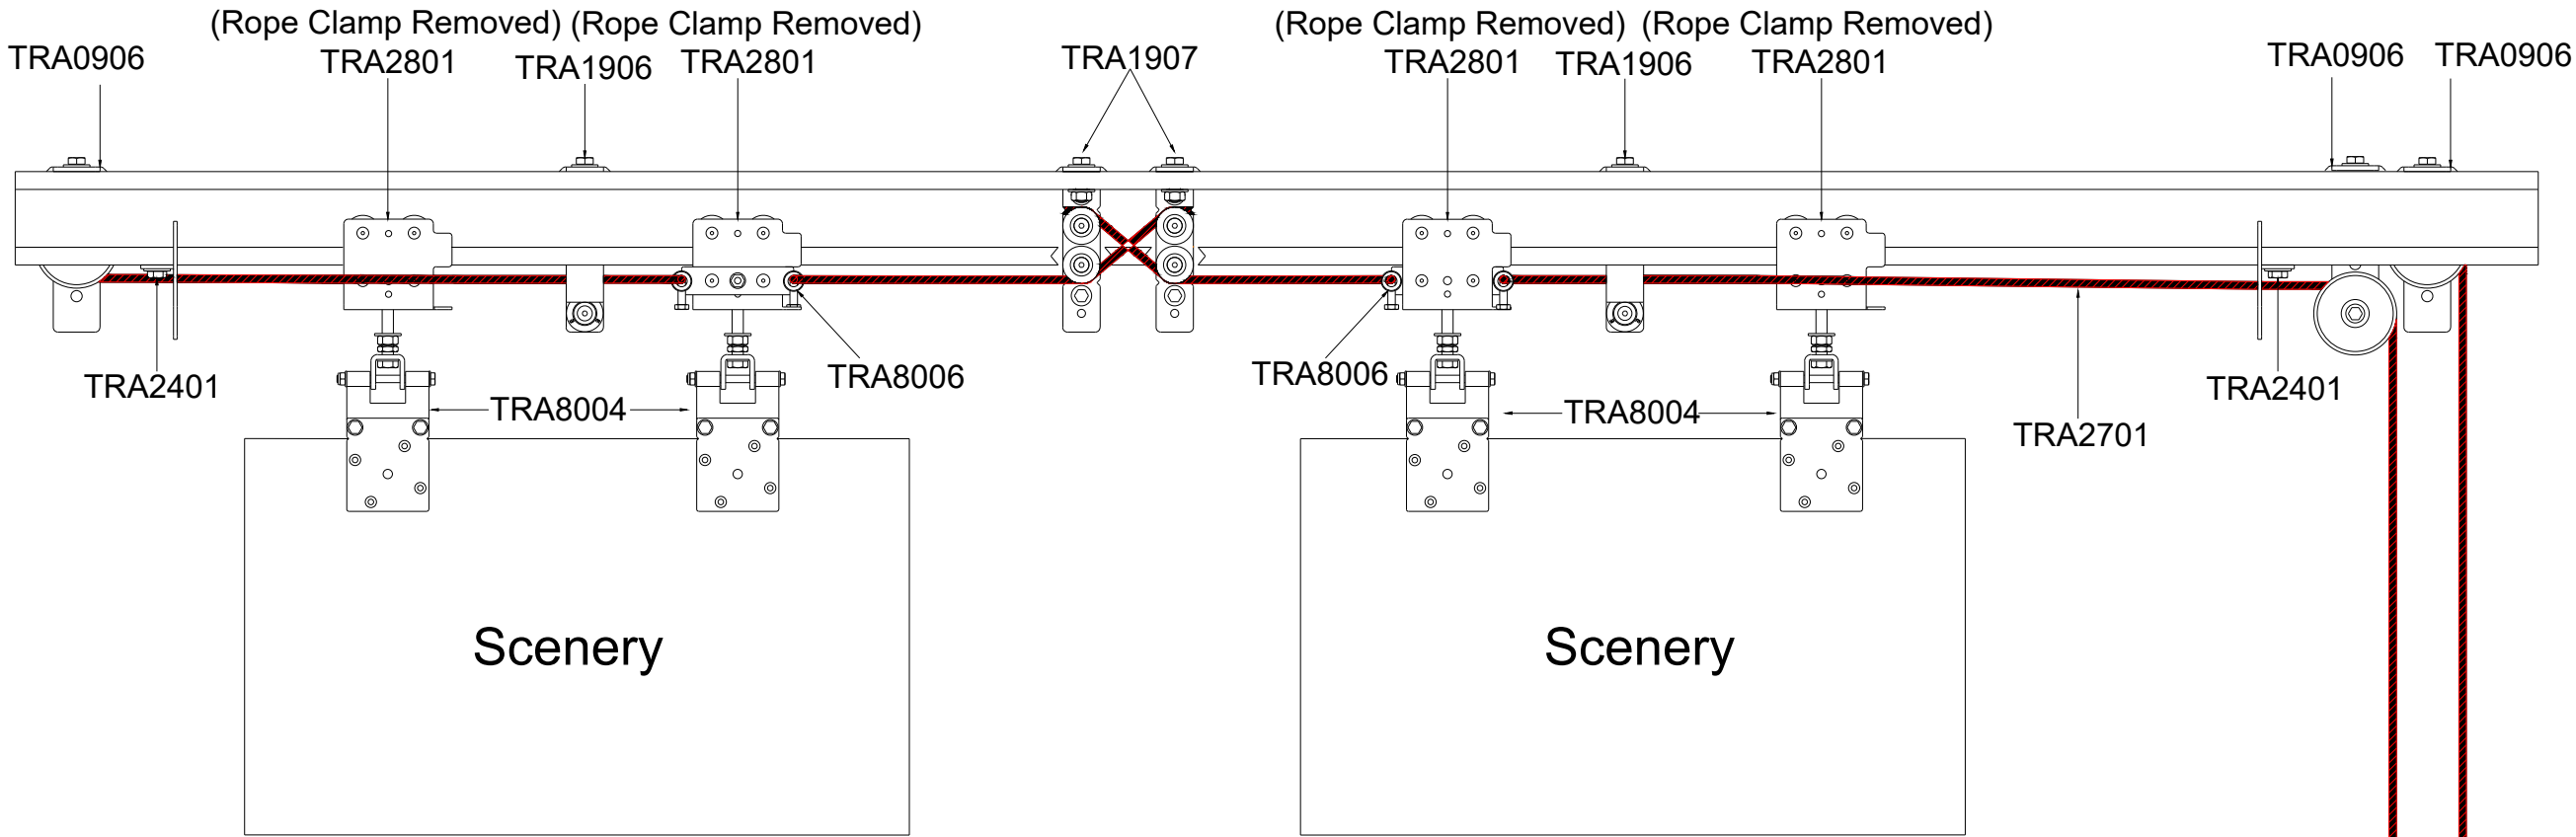

METHOD OF ROPE CLAMPING

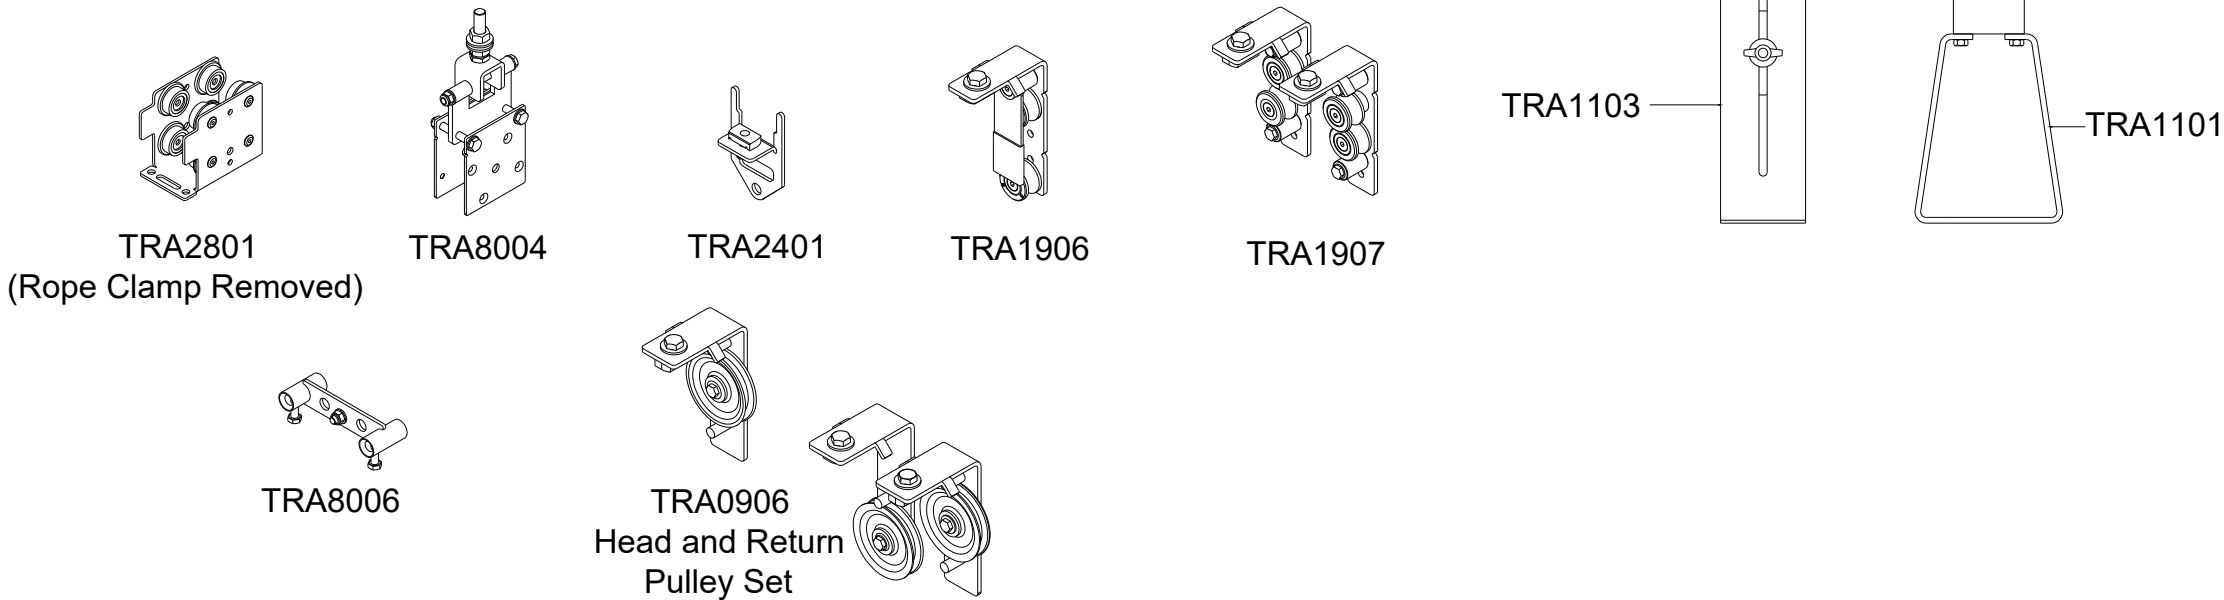

Triple E Ltd
13A AIRPORT IND. EST.
WIRELESS ROAD
BIGGIN HILL
KENT
TN16 3BW
TEL: +44 (0) 1959 570333
WWW.TRIPLEE.LTD

THE CONTENTS OF THIS DRAWING CONSTITUTES
DESIGN COPYRIGHT AND MAY NOT BE
REPRODUCED OR DISCLOSED TO A THIRD PARTY
WITHOUT PRIOR WRITTEN PERMISSION FROM
TRIPLE E LTD

ALL DIMENSIONS IN MILLIMETERS (mm)
UNLESS STATED OTHERWISE
GENERAL TOLERANCES TO FOLLOW ± 0.2

TITLE
**SIDE CORDED WITH CENTRE
BUTTING SCENERY
VIEWED FROM SIDE**

DRAWING No.
UBM-CD17

REV
2

SPECIAL INSTRUCTIONS
SUSPENSION METHOD NOT SHOWN.

HEAVY DUTY SCENERY CARRIERS ARE ALSO
AVAILABLE. HD END STOPS SHOULD BE USED
WITH THESE CARRIERS

DRAWN BY: DS	DATE: 15/06/2026
APPROVED BY:	DATE:
SCALE: NTS	SHEET SIZE: A3